


PRECISION SPI DIGITAL CONTACTLESS ROTARY POSITION SENSORS - FLANGE MOUNTING

Series 25P PP F
Series 30P PP F

Ø25 mm & 30 mm plastic robust housing
Direct SPI interface to microcontroller
Flange mounting
Shock and vibration proof
Alternative to optical encoder

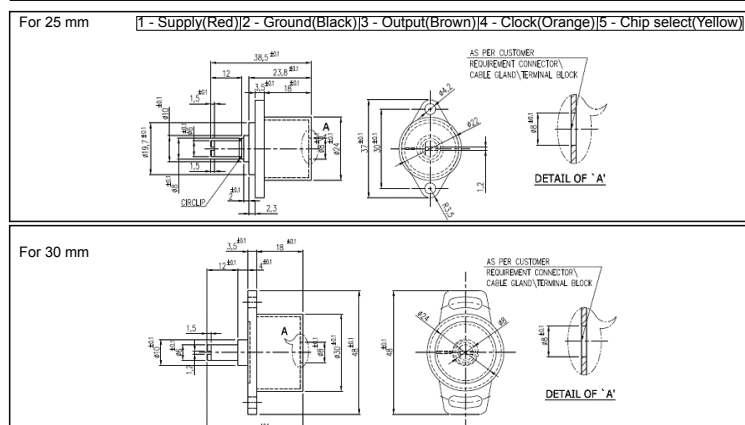

with connector




with cable gland

FUNCTION PRINCIPLE

The angular position and the signal generation is detected by a CMOS Hall sensor over which a parallel diametrically polarized magnet induces a magnetic field. An integrated electronic provides the output of a 2 byte WORD with an SPI interface.

SERIAL PERIPHERAL INTERFACE

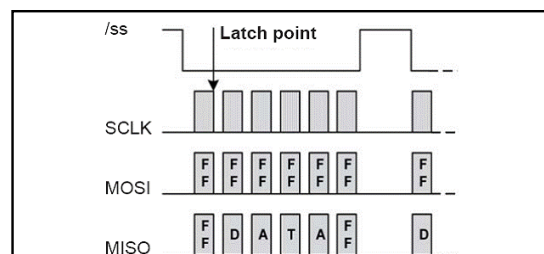

The serial peripheral interface (SPI) is a bus system for a serial synchronous data transmission between different integrated circuits. The bus consists of 3 lines MOSI (Master Out --> Slave In), MISO (Master In <-- Slave Out), SCLK - (Serial Clock, output from master) and SS Slave Select (active low; output from master). By these signal lines the master selects the slave for communication. This is done because the master sets the SS line from high to low. The angular informations are calculated all 350 and are available for the master on demand. There is no fixed protocol for the SPI bus. Nevertheless many microcontroller IC's have a SPI input. By programming this microcontroller IC many SPI suitable sensors can be managed by one microcontroller.

ELECTRICAL CHARACTERISTICS

Electrical angle	0 - 360°
Resolution	14 bit (16383 steps)
Output signal	Absolute SPI
Frequency response	5 KHz
Supply voltage	5V ± 10%
Supply current	< 30 mA

MECHANICAL CHARACTERISTICS

Mechanical angle	360°
Mechanical speed (max.)	3000 rpm
Electrical speed (max.)	800 rpm
Operating life (approx.)	15 million rotations
Operating temperature	- 40 ... +85 °C
Operating torque (approx.)	0.5 Ncm
Output connection	Cable gland (with 1 meter cable)
Weight	12 gm (25P RS F) / 30 gm (30P RS F)

MATERIAL

Bearing	Polymer bearing
Housing	Nylon 66 Glass Fibre reinforced
Shaft	stainless steel
Cable	5 core round cable

OPTIONS AND ORDERING REFERENCES

Refer to electrical & mechanical options on page 2

25 & 30 mm Housing diameter	Serial peripheral interface (SPI) output	Pewatron Angular Sensor	Flange (shaft Ø 6mm) Flange (shaft Ø 6.35mm)	Signal 5V	2 Channel output	14 bit output	Clockwise (CW) Counter clockwise (CCW)	Programming options	Zero point	Special shaft length (std 16 mm FMS)	Special cable length (std 1m cable)	Output connections Cable gland (std) Miniature connector Terminal block (A-Axial & R-Radial)
25/30	P	PP	F1 F2	05 SPI	2C	S 14	CW CCW	POx	POZ	Axx	CVxx	OCx OCG OCM OCT
25/30	P	PP	Fx	05 SPI	2C	S14	CW / CCW	POx		Axx	CVxx	OCx
Example with description - 25 P PP F1 05SPI S14 CW POZ - 25 mm housing diameter, SPI output, Ecoline rota speedconnect, Flange 6mm shaft, 5V, 14 bit, clockwise, zero point												
Standard Version : 360° CW Electrical & Mechanical angle, 05 SPI, OCG - Cable gland, LT - Low torque												

ELECTRICAL OPTIONS FOR SPI VERSIONS 25/30P PP F

PP Series are the latest development in rotational position sensors and contactless devices. Modern Hall IC's in combination with special magnets and RISC processors provide intelligent customizing of output signals and interfacing. Not only precision potentiometer but also optoelectronic incremental and absolute encoders are replaced. The PP series is divided into 3 groups : analog types with analog output (replacement for precision potentiometer), incremental output (replacement of optoelectronic encoders), absolute digital SPI and SSI output. Because of wide variety of mechanical and electrical options it is possible to use them in almost any automation and control application where rotary angular sensing is required. Regardless of the wide variety of existing technical features, the price is relative low.

SPI Bus Interface The Serial Peripheral Interface bus or SPI bus is a synchronous serial data link standard developed by Motorola that operates in full duplex mode. One or more devices can communicate with one master. The length of the signal wire should not be longer than 0.5m. To bridge larger distances it is recommended to use the SSI interface. The digital signal in 2 byte Grey code transmits the angular position information through the data bus.

Direction of Rotation (xxxx CW / CCW)

The standard direction of rotation is clockwise (CW). It is also possible to change the direction of turning to counter clockwise mode (CCW).

Zero Point Programming (POZ)

The electrical zero point is at the beginning of the signal rise. If a shaft marking is brought in line with the housing marking, the electrical zero point can be set to that position. Beside that it is also possible to position the zero point at any position within the mechanical angle. In any case it is necessary to have a reference to the shaft marking.

2 Channel Output (2C)

The Hall sensor chip which is integrated into the sensor consists of two galvanically separated sensor units which are influenced by the same magnetic field. The sensor provides 2 operating modes: 1) redundancy i.e. channel one and channel two are identical. If one channel fails the other channel remains active. 2) It is also possible to have 2 different programs in the 2 channels. For this, additional functions can be obtained.


MECHANICAL OPTIONS FOR SPI VERSION 25/30P PP F

Type / Series	Standard mechanical options	Customized mechanical options
22P PP F	Sinter bronze bearing in steel, Mu metal cap	Special shaft length

SPEEDCONNECT OUTPUT CONNECTIONS FOR SPI VERSIONS 25/30P PP F


Cable gland (OCG)

3,5,6 core cable of 1 m length according to interface




Miniature connector (OCM)

3,5,6 pin in integrated socket with plug according to interface




Terminal block - Axial (OCTA) Wires leaving axial to shaft axis

3,5,6 sockets according to interface

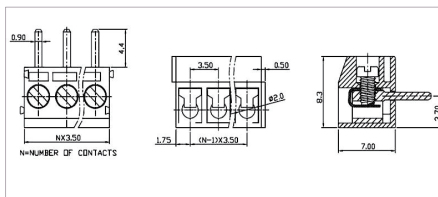

Terminal block - Radial (OCTR) Wires leaving radial to shaft axis

3,5,6 sockets according to interface

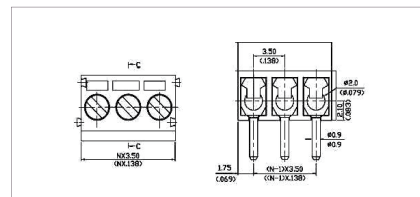

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
