




**SERIES NAVE  
PLUG**  
**CODE 467031**

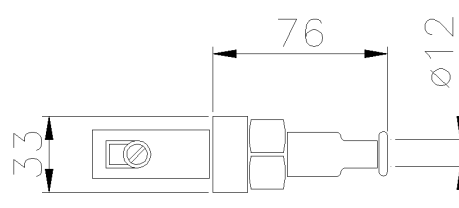

### Datasheet

#### Electrical characteristics

|                          |                   |
|--------------------------|-------------------|
| Rated current            | 10A               |
| Supply Voltage           | 230V 50/60Hz      |
| Poles                    | 2P+ $\frac{1}{2}$ |
| Clock Position           | -                 |
| Rated insulation voltage | -                 |
| Signal plug inserted     | -                 |

#### Reference Standards and Directives

|                                  |                                                                    |
|----------------------------------|--------------------------------------------------------------------|
| Certification and approval marks |                                                                    |
| Directives                       | 2011/65/EU (RoHS), 2012/19/EU (WEEE)                               |
| Reference Standards              | EN 60529:1991, EN 60529:1991/A1:2000, EN IEC 63000:2018, UNAV 1437 |

#### Mechanical characteristics

|                                |                                                  |
|--------------------------------|--------------------------------------------------|
| Manufacturing material         | Elastomer                                        |
| Alveolus/plugs treatment       | -                                                |
| Color                          | -                                                |
| Tightening diameter            | 12 mm                                            |
| Execution                      | Mobile                                           |
| IP Protection degree           | IP56                                             |
| Additional IPdegree protection | -                                                |
| Shock resistance               | IK10 according to IEC/EN 62262                   |
| Resistance to Glow wire        | -                                                |
| Flame rating according UL94    | -                                                |
| Terminals type                 | Screw - indirect clamping                        |
| Conductors section (Cu)        | Min: 1 mm <sup>2</sup> ;Max: 2.5 mm <sup>2</sup> |
| Terminal tightening torque     | 1,2 Nm                                           |
| Net Weight                     | 0.17 KG                                          |
| Working Environment Temp.      | Min: -40°C ;Max: +70°C                           |
| Warehousing Temperature        | Min: -50°C ;Max: +80°C                           |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.