


SERIES CAM
SELECTOR SWITCH
CODE 276706



16A – 25A

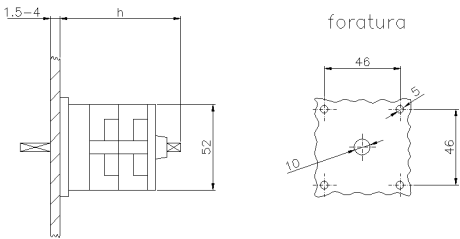

Datasheet

Specifications	
Net Weight	0.28 KG
Additional IPdegree protection	IP65 front plate
Rated current	25A
Frequency	50/60Hz
IP Protection degree	IP00
Poles	3P
Rated operating voltage	50V-500V~
Manufacturing material	Palazzoli Thermosetting GRP
Width	64 mm
Execution	Blackplane
Type of protection	None
Dimensions	64X64X114 mm
Depth	84 mm
CAM layout	6
Function Apparatus Control	Selector switches

Reference Standards and Directives	
Certification and approval marks	UKCA, CE
Directives	2014/35/EU (LVD)
Reference Standards	EN 60947-1:2007, EN 60947-1:2007/A1:2011, EN 60947-1:2007/A2:2014, EN 60947-3:2009, EN 60947-3:2009/A1:2012, EN 60947-3:2009/A2:2015

The images are purely indicative. Palazzoli reserves the right to make changes without notice.