




SERIES ALUPRES EMPTY DISTRIBUTION BOARDS

CODE 511302

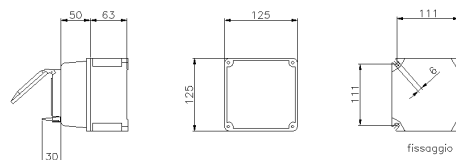

Datasheet

Electrical characteristics

Insulation Class	I
Rated insulation voltage	-
Rated operating voltage	-
Dissippable Power	50W

Mechanical characteristics

Manufacturing material	Marine aluminium alloy (EN 44300)
Treatment type	Fluorozirconic passivation
Surface finishing	Non-toxic polyester paint anti UV curing in the oven
Color	Grey RAL 7035 (Base), Blue RAL 5012 (Cover)
Execution	Wall mounting
Height Box	95 mm
Cover height	57 mm
Cover type	With transparent door
N. of modules on DIN rail	11
Hole type	-
Window type	-
IP Protection degree	IP66/IP67
Additional IPdegree protection	IP69 - IEC 60529
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	Equivalent to C5(M)/C4(H) (ISO 12944)
Working Environment Temp.	Min: -40°C ;Max: +90°C
Warehousing Temperature	Min: -50°C ;Max: +90°C
Dimensions	250X185 mm
Internal dimensions	-
Net Weight	2.22 KG

Reference Standards and Directives

Certification and approval marks NYCE COLOMBIA, UKCA, CE

Directives	2014/35/EU (LVD)
------------	------------------

Reference Standards	EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN 62208:2011
---------------------	---

The images are purely indicative. Palazzoli reserves the right to make changes without notice.