




SERIES CONTACT  
TERMINAL BLOCK  
CODE 159045

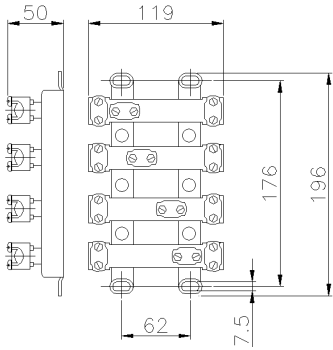

Datasheet

| Specifications                 |                                                        |
|--------------------------------|--------------------------------------------------------|
| Connecting Terminals           | Saddle terminals on ceramic base                       |
| Manufacturing material         | Ceramic                                                |
| Contact material               | Brass                                                  |
| Terminals type                 | Screw - indirect clamping                              |
| No. poles for section          | 4x120 mm <sup>2</sup>                                  |
| Conductors section (Cu)        | Min: 95 ;Max: 120 mm <sup>2</sup>                      |
| Terminal tightening torque     | 2,5 Nm                                                 |
| Rated current                  | 269A                                                   |
| Rated operating voltage        | 500V                                                   |
| Rated impul. withstand voltage | 6,000                                                  |
| Functional maintenance         | 830°C 120' (IEC 60331-1) E30 - E60 - E90 (DIN 4102-12) |
| Working Environment Temp.      | Min: -50°C ;Max: +100°C                                |
| Warehousing Temperature        | Min: -50°C ;Max: +100°C                                |
| Net Weight                     | 1.72 KG                                                |

| Reference Standards and Directives |                                                    |
|------------------------------------|----------------------------------------------------|
| Directives                         | 2011/65/EU (RoHS)2012/19/EU (WEEE)2014/35/EU (LVD) |
| Reference Standards                | EN 60999-2:2003EN IEC 63000:2018                   |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.