




**SERIES TOP-TER
SOCKET OUTLET
CODE 489233**

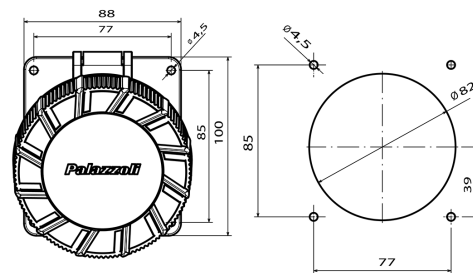

Datasheet

Electrical characteristics

Rated current	32A
Supply Voltage	380/440V 50/60Hz
Poles	3P+ $\perp$
Clock Position	3h
Rated insulation voltage	690 V
Signal plug inserted	Contact aux NO/NC (optional)

Reference Standards and Directives

Certification and approval marks	ENEC 05, UKCA, KEMA-KEUR, NYCE COLOMBIA, CE
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN IEC 63000:2018

Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Alveolus/plugs treatment	-
Color	Grey RAL 7035
Tightening diameter	-
Execution	Panel mounting
IP Protection degree	IP66/IP67
Additional IPdegree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	850°C (Socket)
Flame rating according UL94	V-2 (Socket)
Terminals type	Screw - direct tightening
Conductors section (Cu)	Min: 2.5 mm ² ;Max: 6 mm ²
Terminal tightening torque	1,8 Nm
Net Weight	0.27 KG
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -30°C ;Max: +70°C

The images are purely indicative. Palazzoli reserves the right to make changes without notice.