


SERIES ALUPRES
INTERLOCKED SOCKET
CODE 472367

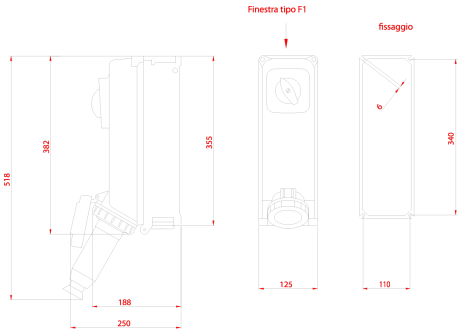

Datasheet

Specifications	
Net Weight	3.36 KG
Front panel	472327s.png
Electric system	PRIF63A_3P.png
Rated current	63A
Frequency	50/60Hz
IP Protection degree	IP65
Poles	3P+ $\frac{1}{2}$
Clock Position	12h
Rated operating voltage	>50V for isolation transformer
Rated insulation voltage	500 V V
Manufacturing material	Aluminum alloy
Width	125 mm
Execution	Wall mounting
Type of protection	Fuses
Insulation Class	I
Dimensions	125X387X189 mm
Hole type	Window type F1

Reference Standards and Directives	
Certification and approval marks	NYCE COLOMBIA, CE, IMQ
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN 60309-4:2007, EN 60309-4:2007/A1:2012, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.