


**CODE 217402**

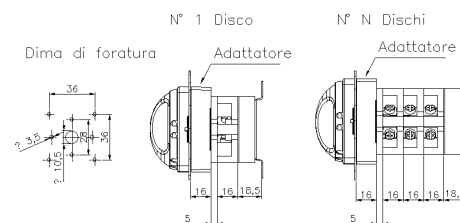

## Specifications

|                                |                               |
|--------------------------------|-------------------------------|
| Net Weight                     | 0.4 KG                        |
| Additional IPdegree protection | IP65 front plate              |
| Rated current                  | 40A                           |
| Frequency                      | 50/60Hz                       |
| IP Protection degree           | IP20                          |
| Poles                          | 2P                            |
| Rated operating voltage        | 50V-500V~                     |
| Manufacturing material         | High resistance technopolymer |
| Width                          | 67 mm                         |
| Execution                      | Blackplane                    |
| Dimensions                     | 67X67X76 mm                   |
| Depth                          | 46 mm                         |
| CAM layout                     | 5                             |
| No. discs                      | 2                             |
| Function Apparatus Control     | Selector switches             |

Certification and approval marks UKCA, CE

|                     |                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Directives          | 2014/35/EU (LVD)                                                                                                                             |
| Reference Standards | EN 60947-1:2007, EN 60947-1:2007/A1:2011<br>EN 60947-1:2007/A2:2014, EN 60947-3:2009<br>EN 60947-3:2009/A1:2012, EN 60947<br>-3:2009/A2:2015 |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.