




**SERIES CAM**  
**CMP\_INT**  
**CODE 282402**

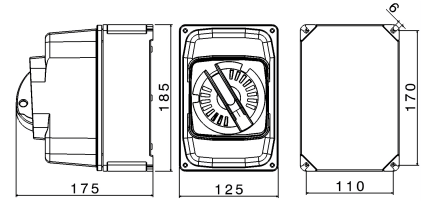

### Datasheet

#### Electrical characteristics

|                            |                  |
|----------------------------|------------------|
| Rated current              | 63A              |
| Supply Voltage             | 690V~ 50/60Hz    |
| Poles                      | 3P               |
| Rated insulation voltage   | 690 V            |
| Insulation Class           | I                |
| CAM layout                 | 2                |
| Function Apparatus Control | One way switches |
| Type of protection         | None             |

#### Mechanical characteristics

|                                |                                                      |
|--------------------------------|------------------------------------------------------|
| Manufacturing material         | Marine aluminium alloy (EN 44300)                    |
| Treatment type                 | Fluorozirconic passivation                           |
| Surface finishing              | Non-toxic polyester paint anti UV curing in the oven |
| Color                          | Grey RAL 7035 (Base), Blue RAL 5012 (Cover)          |
| Execution                      | Wall mounting                                        |
| Dimensions                     | 185X125X150 mm                                       |
| Depth                          | -                                                    |
| Front-plate dimension          | -                                                    |
| Hole type                      | Window type F1                                       |
| IP Protection degree           | IP66/IP67                                            |
| Additional IPdegree protection | -                                                    |
| Shock resistance               | IK10 according to IEC/EN 62262                       |
| Resistance to Glow wire        | 960°C (Switch)                                       |
| Flame rating according UL94    | V-0 (Switch)                                         |
| Corrosivity category           | Equivalent to C5(M)/C4(H) (ISO 12944)                |
| Net Weight                     | 1.7 KG                                               |
| Working Environment Temp.      | Min: -50°C ;Max: +60°C                               |
| Warehousing Temperature        | Min: -50°C ;Max: +80°C                               |

#### Technical data switch

|                             |                               |
|-----------------------------|-------------------------------|
| Thermal current             | 63 A                          |
| Rated short-circuit current | 10 kA                         |
| Terminals type              | Screw - indirect clamping     |
| Conductors section (Cu)     | Min: 10 mm <sup>2</sup> ;Max: |
| Terminal tightening torque  | 3 Nm                          |
| Auxiliary status contacts   | Max 2 (optional)              |
| Padlockable handle          | 3 locks Ø8 mm max             |

#### Operating category

| Categoria Rating | Tensione Voltage | Corrente / Potenza Current / Power |
|------------------|------------------|------------------------------------|
| AC-22A           | 230 V            | 63 A                               |
|                  | 400 V            | 63 A                               |
|                  | 500 V            | 63 A                               |
|                  | 690 V            | 63 A                               |
| AC-23A           | 230 V            | 63 A / 20.1 kW                     |
|                  | 400 V            | 63 A / 34.9 kW                     |
|                  | 500 V            | 63 A / 43.6 kW                     |
|                  | 690 V            | 63 A / 60.2 kW                     |
| AC-3             | 230 V            | 40 A / 12.7 kW                     |
|                  | 400 V            | 40 A / 22.2 kW                     |
|                  | 500 V            | 40 A / 27.7 kW                     |
|                  | 690 V            | 40 A / 38.2 kW                     |

#### Reference Standards and Directives

|                                  |                                                                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certification and approval marks | CE, UKCA                                                                                                                                                |
| Directives                       | 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)                                                                                                  |
| Reference Standards              | EN 60947-1:2007, EN 60947-1:2007/A1:2011, EN 60947-1:2007/A2:2014, EN 60947-3:2009, EN 60947-3:2009/A1:2012, EN 60947-3:2009/A2:2015, EN IEC 63000:2018 |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.