




SERIES ENERGY
EMPTY METALBOX ON BOARD
CODE 500884

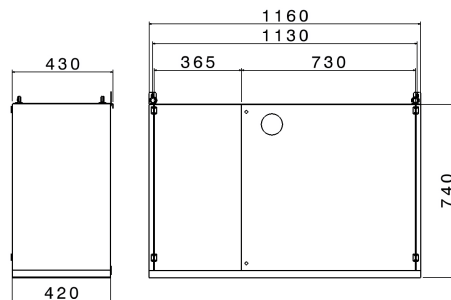

Datasheet

Electrical characteristics

Insulation Class	I
Rated insulation voltage	500 V
Dissipable Power	-

Reference Standards and Directives

Certification and approval marks	CE, UKCA
Directives	2014/35/EU (LVD)

Mechanical characteristics

Manufacturing material	Galvanized and painted steel
Color	Blue RAL 5015
Execution	CABINETS
Door type	-
Number and type of closures	2 triangle key closure
N. of modules on DIN rail	-
Internal working depth	390
IP Protection degree	IP65
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	C3 (ISO 12944)
Working Environment Temp.	Min: -25 °C ;Max: +50 °C
Warehousing Temperature	Min: -30 °C ;Max: +70 °C
Dimensions	1160X740X430 mm
Internal dimensions	1065X685 mm
Net Weight	50.8 KG
Maximum permissible load	On the doors: 0 kg; Mounting surfaces: 20 kg; On the bottom: 0 kg

Reference Standards	EN 62208:2011
---------------------	---------------

The images are purely indicative. Palazzoli reserves the right to make changes without notice.