


SERIES ALUPRES
INTERLOCKED SOCKET
CODE 472533

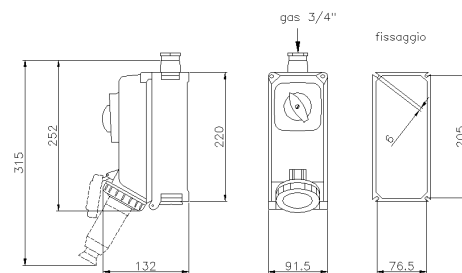

Datasheet

Specifications

Net Weight	1.841 KG
Front panel	472453s.png
Electric system	PRIF16A_3PN.png
Rated current	16A
Frequency	60Hz
IP Protection degree	IP67
Poles	3P+N+ $\perp$
Clock Position	11h
Rated operating voltage	440-460V ●
Rated insulation voltage	500 V V
Manufacturing material	Aluminum alloy
Width	92 mm
Execution	Wall mounting
Type of protection	Fuses
Insulation Class	I
Operating category	AC-23A / AC-3 16A - 460V
Dimensions	92X230X132 mm
Hole type	Window type F0
Min. Amb. Temp.	-25°C
Max. Amb. Temp.	+50°C
Storage room temperature MIN	-30°C
Storage room temperature MAX	+70°C

Reference Standards and Directives

Certification and approval marks NYCE COLOMBIA, IMQ, CE, CB IMQ

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)

Reference Standards EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN 60309-4:2007, EN 60309-4:2007/A1:2012, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.