




**SERIES DRIVEBOX
ENCLOSURE**
CODE 158261

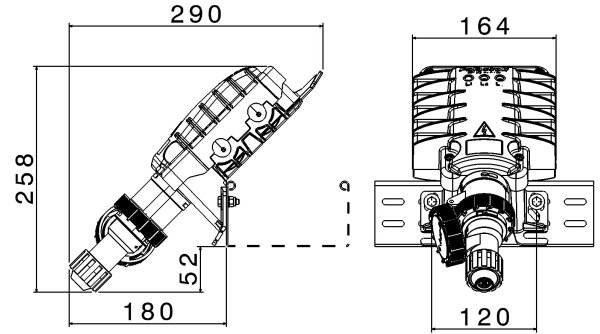

Datasheet

Electrical characteristics

Insulation Class	II
Rated insulation voltage	690 V
Rated operating voltage	230V AC
Connecting Terminals	Pierce-through
Type of protection	Fuses
Fuse Type	1 Fuse 4 A (L)

Mechanical characteristics

Manufacturing material	High resistance technopolymer
Treatment type	-
Surface finishing	-
Color	RAL 7042 (Base), Blue RAL 5012 (Cover)
Execution	Wall mounting
Hole type	-
Direct output	Presa 2P+T
IP Protection degree	IP66
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	960°C
Flame rating according UL94	V-0 (Casing), V-2 (Body of the socket)
Corrosivity category	-
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -30°C ;Max: +70°C
Functional maintenance	-
Resistance to temperature	-
Line cable sections	2,5-50 mm ²
Tightening diameter	8÷18,2 mm
Dimensions	275X165X130 mm
Net Weight	0.9 KG

Reference Standards and Directives

Certification and approval marks	CE, UKCA
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	CEI 64-20:2023, EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN 60670-1:2005, EN 60670-1:2005/A1:2013, EN 60670-1:2005/AC:2007, EN 60670-1:2005/AC:2010, EN 60670-22:2006, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.