




**SERIES MULTIMAX  
SOCKET OUTLET**  
**CODE 720136**

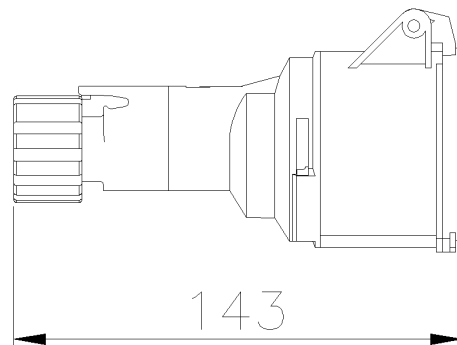

## Datasheet

### Electrical characteristics

|                          |                   |
|--------------------------|-------------------|
| Rated current            | 16A               |
| Supply Voltage           | 400V 50/60Hz ●    |
| Poles                    | 3P+ $\frac{1}{2}$ |
| Clock Position           | 6h                |
| Rated insulation voltage | 690 V             |
| Signal plug inserted     | -                 |

### Reference Standards and Directives

|                                  |                                                                                                    |
|----------------------------------|----------------------------------------------------------------------------------------------------|
| Certification and approval marks | IMQ, UKCA, CB IMQ, NYCE COLOMBIA, CE                                                               |
| Directives                       | 2011/65/EU (RoHS), 2014/35/EU (LVD)                                                                |
| Reference Standards              | EN IEC 60309-1:2022, EN IEC 60309<br>-1:2022/AC:2023-06, EN IEC 60309-2:2022,<br>EN IEC 63000:2018 |

### Mechanical characteristics

|                                |                                                |
|--------------------------------|------------------------------------------------|
| Manufacturing material         | Technopolymer Recyclable Palazzoli             |
| Alveolus/plugs treatment       | -                                              |
| Color                          | Grey RAL 7042                                  |
| Tightening diameter            | 8,5 ÷ 14 mm                                    |
| Execution                      | Mobile                                         |
| IP Protection degree           | IP44                                           |
| Additional IPdegree protection | -                                              |
| Shock resistance               | IK08 according to IEC/EN 62262                 |
| Resistance to Glow wire        | 850°C                                          |
| Flame rating according UL94    | V-2                                            |
| Terminals type                 | Screw - direct tightening                      |
| Conductors section (Cu)        | Min: 1 mm <sup>2</sup> ;Max: 6 mm <sup>2</sup> |
| Terminal tightening torque     | 1,8 Nm                                         |
| Net Weight                     | 0.15 KG                                        |
| Working Environment Temp.      | Min: -25°C ;Max: +50°C                         |
| Warehousing Temperature        | Min: -30°C ;Max: +70°C                         |

The images are purely indicative. Palazzoli reserves the right to make changes without notice.