


SERIES ALUPRES
INTERLOCKED SOCKET
CODE 472586

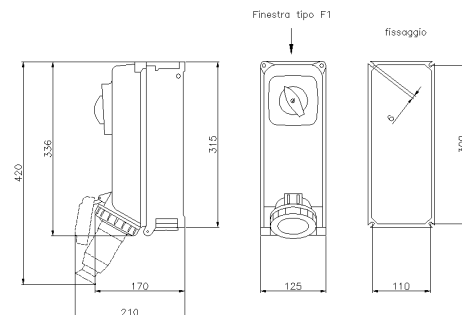

Datasheet

Specifications

Net Weight	3.48 KG
Front panel	472456s.png
Electric system	PRIF32A_3PN.png
Rated current	32A
Frequency	50/60Hz
IP Protection degree	IP67
Poles	3P+N+ $\perp$
Clock Position	3h
Rated operating voltage	380-440V ●
Rated insulation voltage	500 V V
Manufacturing material	Aluminum alloy
Width	125 mm
Execution	Wall mounting
Type of protection	Fuses
Insulation Class	I
Operating category	AC-23A / AC-3 32A - 440V
Dimensions	125X335X170 mm
Hole type	Window type F1
Min. Amb. Temp.	-25°C
Max. Amb. Temp.	+50°C
Storage room temperature MIN	-30°C
Storage room temperature MAX	+70°C

Reference Standards and Directives

Certification and approval marks IMQ, CE, NYCE COLOMBIA, CB IMQ

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)

Reference Standards EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN 60309-4:2007, EN 60309-4:2007/A1:2012, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.