




SERIES NAVE
INTERLOCKED SOCKET
CODE 462131

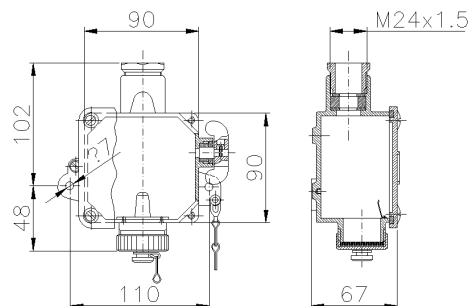

Datasheet

Electrical characteristics

Rated current	10A
Supply Voltage	230V 50/60Hz
Poles	2P+ $\frac{1}{2}$
Clock Position	-
Rated insulation voltage	500 V
Insulation Class	I
Type of protection	-
Signal plug inserted	-

Technical data switch

Thermal current	10 A
Rated short-circuit current	-
Terminals type	Screw - indirect clamping
Conductors section (Cu)	Min: 1 mm ² ;Max: 6 mm ²
Terminal tightening torque	2 Nm
Auxiliary status contacts	-
Padlockable handle	-

Mechanical characteristics

Manufacturing material	Brass
Treatment type	-
Surface finishing	Non-toxic polyester paint anti UV curing in the oven
Color	Grey RAL 7040
Width	90 mm
Execution	Wall mounting
Hole type	M24
IP Protection degree	IP56
Additional IPdegree protection	-
Shock resistance	-
Resistance to Glow wire	960°C (Live contacts holder)
Flame rating according UL94	V-0 (Live contacts holder)
Corrosivity category	C4 (ISO 12944)
Net Weight	1.6 KG
Working Environment Temp.	Min: -40°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

Reference Standards and Directives

Certification and approval marks

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE)

Reference Standards EN 60529:1991, EN 60529:1991/A1:2000, EN IEC 63000:2018, UNAV 1436

The images are purely indicative. Palazzoli reserves the right to make changes without notice.