




SERIES NAVE
SOCKET OUTLET
CODE 478213

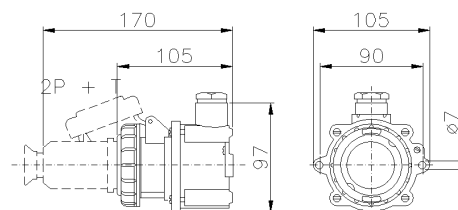

Datasheet

Electrical characteristics

Rated current	16A
Supply Voltage	230V 50/60Hz
Poles	2P+ $\perp$
Clock Position	6h
Rated insulation voltage	500 V
Signal plug inserted	-

Reference Standards and Directives

Certification and approval marks	
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE)
Reference Standards	EN 60529:1991, EN 60529:1991/A1:2000, EN IEC 63000:2018, UNAV 2166:1985

Mechanical characteristics

Manufacturing material	Brass
Alveolus/plugs treatment	Nickel plated
Color	Grey RAL 7042
Tightening diameter	7 ÷ 18 mm
Execution	Wall mounting
IP Protection degree	IP66
Additional IPdegree protection	-
Shock resistance	IK10 according to IEC/EN 62262
Resistance to Glow wire	-
Flame rating according UL94	-
Terminals type	Screw - direct tightening
Conductors section (Cu)	Min: 1.5 mm ² ;Max: 2.5 mm ²
Terminal tightening torque	1,2 Nm
Net Weight	1.1 KG
Working Environment Temp.	Min: -40°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

The images are purely indicative. Palazzoli reserves the right to make changes without notice.