




SERIES CAM
CMP_INT
CODE 286703

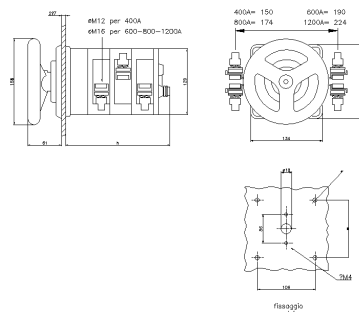

Datasheet

Electrical characteristics

Rated current	400A
Supply Voltage	500V~ 50/60Hz
Poles	4P
Rated insulation voltage	690 V
Insulation Class	-
CAM layout	3
Function Apparatus Control	One way switches
Type of protection	None

Mechanical characteristics

Manufacturing material	-
Treatment type	-
Surface finishing	-
Color	-
Execution	Blackplane
Dimensions	134X134X281 mm
Depth	221
Front-plate dimension	-
Hole type	-
IP Protection degree	IP00
Additional IPdegree protection	IP65 front plate
Shock resistance	-
Resistance to Glow wire	960°C (Switch)
Flame rating according UL94	V-0 (Switch)
Corrosivity category	-
Net Weight	6.3 KG
Working Environment Temp.	Min: -25°C ;Max: +60°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

Technical data switch

Thermal current	400 A
Rated short-circuit current	15 kA
Terminals type	M12X30
Conductors section (Cu)	Min: ;Max:
Terminal tightening torque	-
Auxiliary status contacts	-
Padlockable handle	-
Operating category	

Reference Standards and Directives

Certification and approval marks	UKCA, CE
Directives	2014/35/EU (LVD)
Reference Standards	EN 60947-1:2007, EN 60947-1:2007/A1:2011, EN 60947-1:2007/A2:2014, EN 60947-3:2009, EN 60947-3:2009/A1:2012, EN 60947-3:2009/A2:2015

The images are purely indicative. Palazzoli reserves the right to make changes without notice.