


**SERIES ALUPRES**  
**INTERLOCKED SOCKET**  
**CODE 472286**

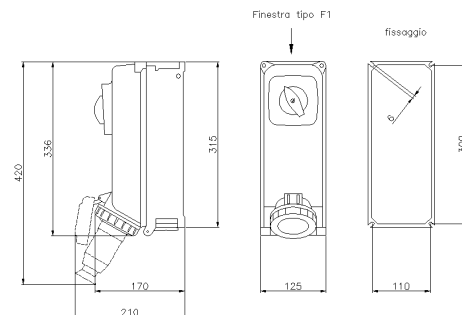

### Datasheet

#### Specifications

|                              |                 |
|------------------------------|-----------------|
| Net Weight                   | 3.35 KG         |
| Front panel                  | 472286s.png     |
| Electric system              | PRIF32A_3PN.png |
| Rated current                | 32A             |
| Frequency                    | 100-300Hz       |
| IP Protection degree         | IP67            |
| Poles                        | 3P+N+ $\perp$   |
| Clock Position               | 10h             |
| Rated operating voltage      | >50V ●          |
| Rated insulation voltage     | 500 V V         |
| Manufacturing material       | Aluminum alloy  |
| Width                        | 125 mm          |
| Execution                    | Wall mounting   |
| Type of protection           | Fuses           |
| Insulation Class             | I               |
| Dimensions                   | 125X335X170 mm  |
| Hole type                    | Window type F1  |
| Min. Amb. Temp.              | -25°C           |
| Max. Amb. Temp.              | +50°C           |
| Storage room temperature MIN | -30°C           |
| Storage room temperature MAX | +70°C           |

#### Reference Standards and Directives

Certification and approval marks CB IMQ, CE, NYCE COLOMBIA, IMQ

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)

Reference Standards EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN 60309-4:2007, EN 60309-4:2007/A1:2012, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.