

Version V1.0.0.0

PFLOW4008

Vendor ID 1267 / 0x04F3 - Bytes: 004 243 / 0x04 0xF3
Device ID 1 / 0x000001 - Bytes: 00 00 01 / 0x00 0x00 0x01
Vendor name APSP
Vendor text sensorsandpower.angst-pfister.com

Communication

IO-Link revision V1.1
Bit rate COM2
Minimum cycle time 5.000 ms
SIO mode supported Yes

Features

Block parametrization No
Data storage No

Device variant


PFLOW4008

MEMS mass flow sensor, with R/N/O6/O8 connectors.

1 Power Supply
2 0~10VDC
3 IO-Link Output
4 GND

Process data Total bit length = 32
(Process data input)

Name	Description	Data type	Bit offset	Bit length	Value range	Gradient	Offset	Unit
Flow rate	Current flow rate	IntegerT	16	16	0 ~ 55000	0.01	0	SLPM

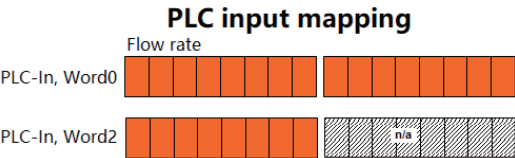

Variables

Name	Description	Index	Subindex	Data type	Length	Access rights	Default	Value range	Gradient	Offset	Unit
Vendor Name		16	Sub 0	StringT	max 10 Byte	ro	APSP				
Vendor Text		17	Sub 0	StringT	max 10 Byte	ro					
Product Name		18	Sub 0	StringT	max 6 Byte	ro	PFLOW4008				
Product ID		19	Sub 0	StringT	max 6 Byte	ro	PFLOW4008				
Product Text		20	Sub 0	StringT	max 11 Byte	ro	Flow sensor				
Serial Number		21	Sub 0	StringT	max 12 Byte	ro					
Hardware Version		22	Sub 0	StringT	max 7 Byte	ro					
Firmware Version		23	Sub 0	StringT	max 7 Byte	ro					

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
