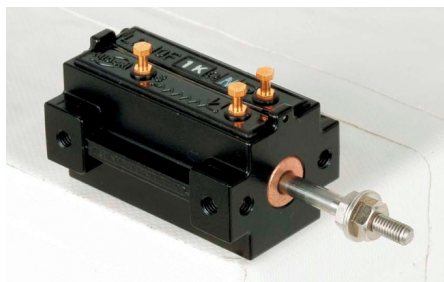


Conductive Plastic Linear Sensor



LP-10F Series - LP-10F, LP-10FB

- Conductive Plastic Linear Sensor
- Effective Electrical Travel : 10mm±0.5mm
- Independent Linearity : ±1%
- Return Spring(LP-10FB)


【Material】

- Housing : Aluminum
- Shaft : Stainless Steel
- Bearing : Copper alloy


■Dimension [mm]

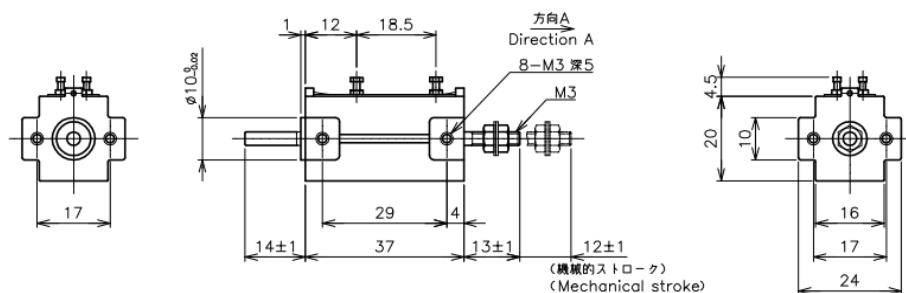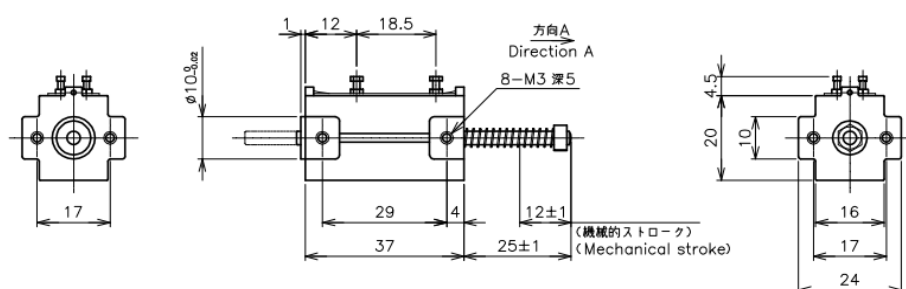LP-10FLP-10FB


■ Output Characteristics



■ Schematic



■ Mounting

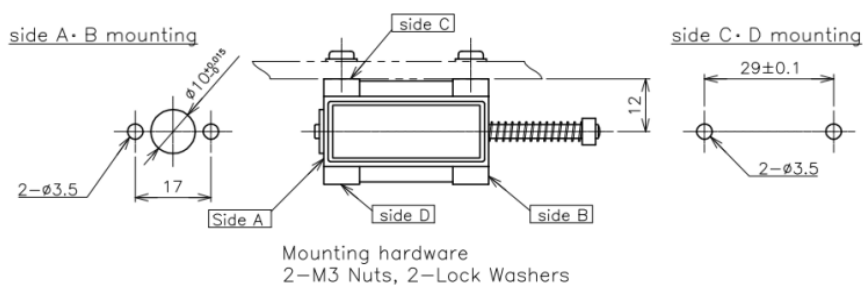

【Model No.】	LP-10F	LP-10FB
-------------	--------	---------

【Electrical Data】

Effective Electrical Travel	10mm±0.5mm	
Total Resistance	1	kΩ
Total Resistance Tolerance	±20	%
Independent Linearity	±1	%
Power Rating	0.3/50°C	W
Output Smoothness	MAX. 0.1	%
Insulation Resistance	MIN. 100 / DC 500V	MΩ
Dielectric Strength	AC500 / 1 Minute	V
TC of Resistance	±1000	ppm/

【Mechanical Data】

Total Mechanical Travel	12mm±1mm	
Friction	MAX. 0.3	MAX. 3N(Spring Strength)N
Mass	60 Approx.	g

【Environmental Data】

Life	MIN. 5 Million	Cycle
Category Temperature Range	-40~+100	°C
Storage Temperature Range	-40~+100	°C
Vibration	100m/s ² 500Hz 3axis 2hours each	
Shock	500m/s ² 11ms 6directions 3times	

■ Accessories

M3 Nut, Plain washers 2 pieces each

■ Handling Instruction

To avoid burnout of resistive element, do not supply 1mA Min. current to terminal 2.

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
