


Contactless Angle Sensor

CP-3HABS Series


- Contactless Angle Sensor
 - Effective Electrical Travel : $\pm 45^\circ$
 - Absolute Linearity : $\pm 4\%FS$
 - IP Rating : IP67
 - Output : Dual Output
 - Return Spring
 - Shaft : D-Cut, Double Side Flat
- 【Material】
- Housing : PBT
 - Shaft : Stainless Steel
 - Bearing : Copper alloy

■ Dimension [mm]

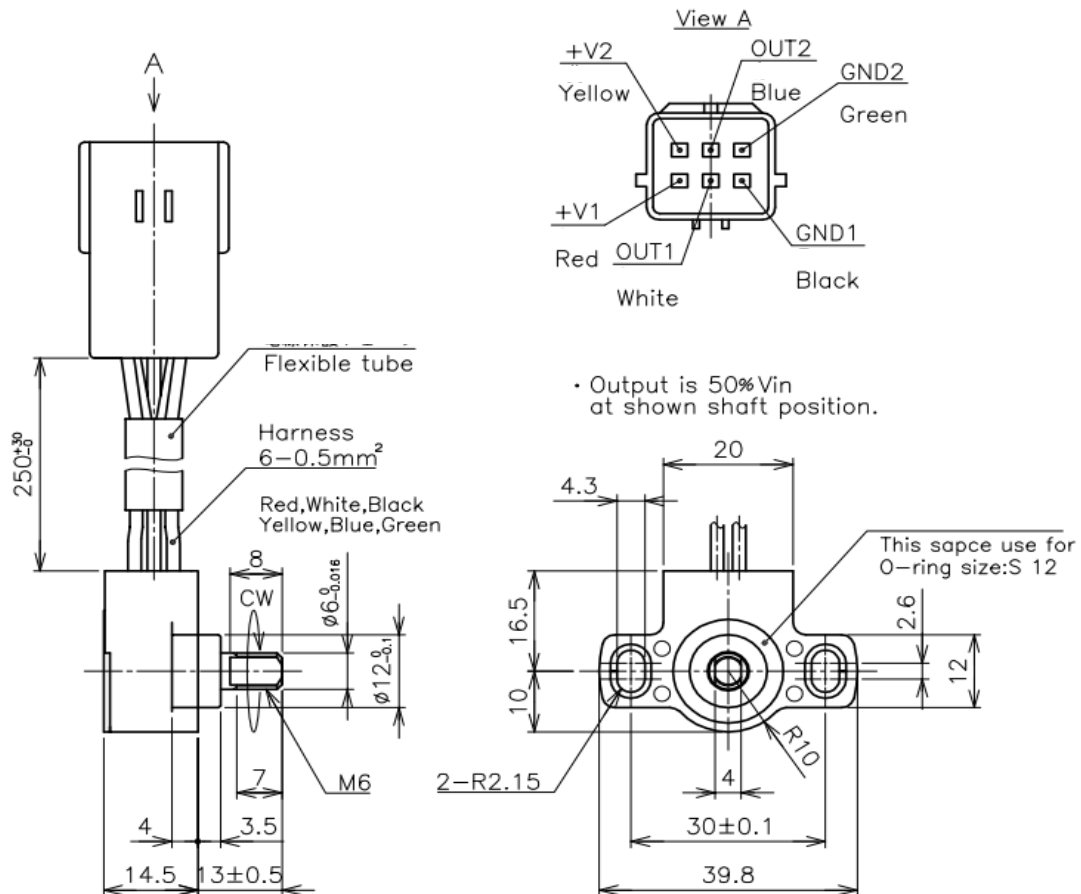


CONNECTOR : TE CONNECTIVITY AMP ECONOSEAL J - MARK II
 CAP HOUSING : 174264-2 TAB CONTACT : 173600-1
 RUBBER PLUG : 2822352-1 DOUBLE LOCK PLATE : 174265-7

Output Characteristics

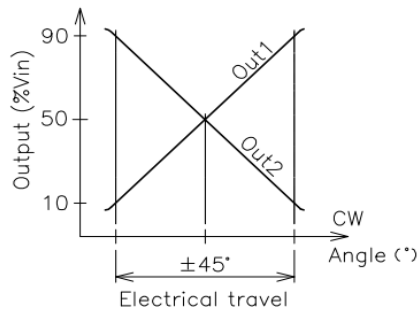


Schematic

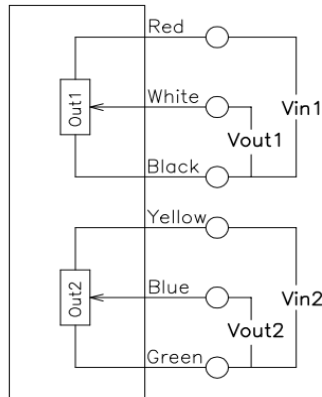

• Red, White, Black, Yellow, Blue, Green indicate harness colors.

Mounting

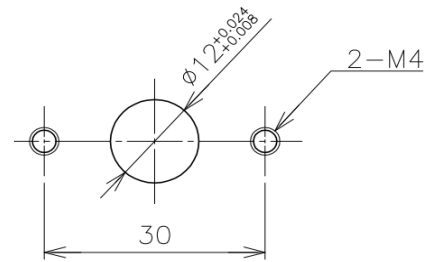

Model Number Designation

CP-3HABS- 2 1 1 - 01

- Shaft : 01=D-Cut, 02=Double Side Flat shaft with
- Return Spring : 0=None, 1=w/Return Spring
- Water proof : 0=IP50, 1=IP65
- Output : 1=Single, 2=Dual

【Model No.】

CP-3HABS

【Electrical Data】

Effective Electrical Travel	±45	°
Output Range	10~90	%Vin
Absolute Linearity (Independent Linearity)	±4(FS=90°) 3%FS)	(± %FS
Input Voltage	DC5±0.5	V
Load Resistance	MIN. 10	kΩ
Supply Current	MAX. 20	mA
Insulation Resistance	100以上/DC50V	MΩ
Resolution	12	bit
Hysteresis	MAX. 0.3	°
Temp. Characteristics -40~125°C (Reference Temp.25°C)	At 0°:±2° At ±45°:±4°	
Two Output Error	±6.4(25°C)	%Vin

【Mechanical Data】

Total Mechanical Travel	120±5	°
Stopper Strength	1	N·m
Torque	5~60	mN·m
Thrust Load Tolerance	3	N
Radial Load Tolerance	6	N
Mass	30 Approx.	g

【Environmental Data】

Life	50Million	Cycle
Operating Temp.	-40~+125	°C
Storage Temperature Range	-40~+125	°C
Vibration	200m/s ² 5~500Hz(6min) 3axis 2hours	
Shock	1000m/s ² 6ms 3axis 3times	
EMS	100V/m 200MHz ~1GHz	
ESD(Case-Each Terminal)	±16(IEC61000-4-2)	kV
ESD(Each Terminal)	±8(IEC61000-4-2)	kV
IP Rating	IP65	

Handling Instruction

- This product may be influenced from external magnetic field.
- Use this sensor in the place where is protected from ESD.

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
