

MAE3 Absolute Magnetic Kit Encoder

Page 1 of 9

Description

The **MAE3** is an absolute magnetic kit encoder that provides shaft position information over 360 ° of rotation with no stops or gaps. This magnetic encoder is designed to easily mount to, and dismount from, an existing shaft to provide digital feedback information. The **MAE3** is available with an analog or a pulse width modulated (PWM) digital output.

Analog output provides an analog voltage that is proportional to the absolute shaft position. Analog output is only available in 10-bit resolution.

PWM output provides a pulse width duty cycle that is proportional to the absolute shaft position. PWM output is available in 10-bit and 12-bit resolutions. While the accuracy is the same for both encoders the 12-bit version provides higher resolution.

The **MAE3** consists of three components: base, push-on magnetic hub, and encoder body. The base will accommodate 0.750", 1.280" and 1.812" mounting bolt circles. No tools are needed for the push-on, collet gripping hub. The hub mounts to a standard shaft in seconds and provides a simple and reliable means of securing the magnet to the shaft.

Two 4-40 pan head screws secure the base and encoder body to any flat surface. If desired, the encoder can be powered up and rotated by hand to any desired absolute position before the screws are tightened.

Connecting to the **MAE3** is simple. The 3-pin, high retention, snap-in 1.25mm pitch polarized connector provides for +5V, output, and ground.




Features

- **ROHS Compliant**
- Quick, simple assembly and disassembly
- -40C to +125C operating temperature
- Accepts .010" axial shaft play
- Mounts to 0.750", 1.280" and 1.812" bolt circles
- Fits shaft diameters from .125" to .250" or 2mm to 6mm
- 10-bit Analog output - 2.6 kHz sampling rate
- 10-bit PWM output - 1024 positions per revolution, 1 kHz
- 12-bit PWM output - 4096 positions per revolution, 250 Hz


MAE3 Absolute Magnetic Kit Encoder

Page 2 of 9

Size 18 Bolt Circle

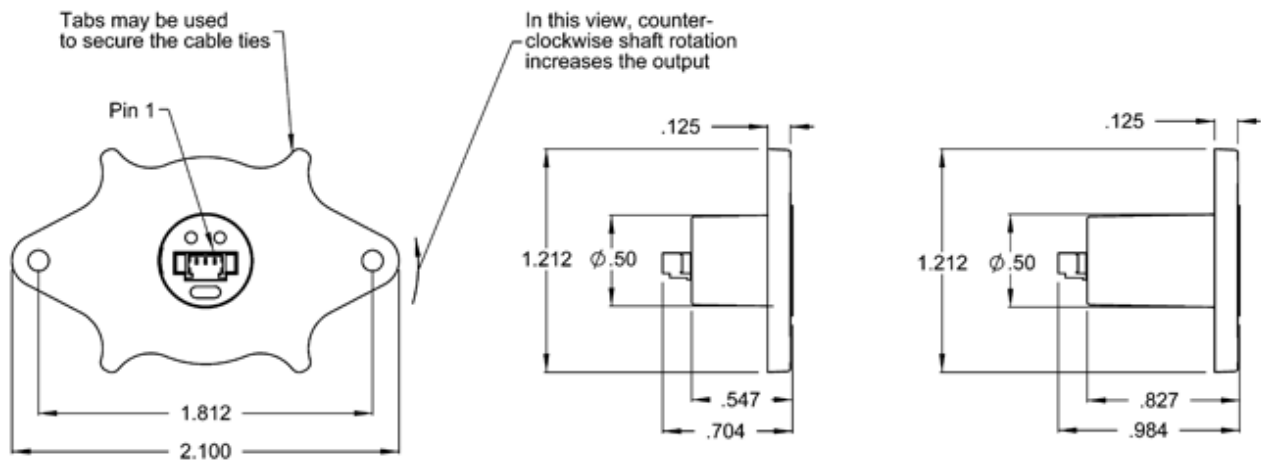


Size 12 Bolt Circle

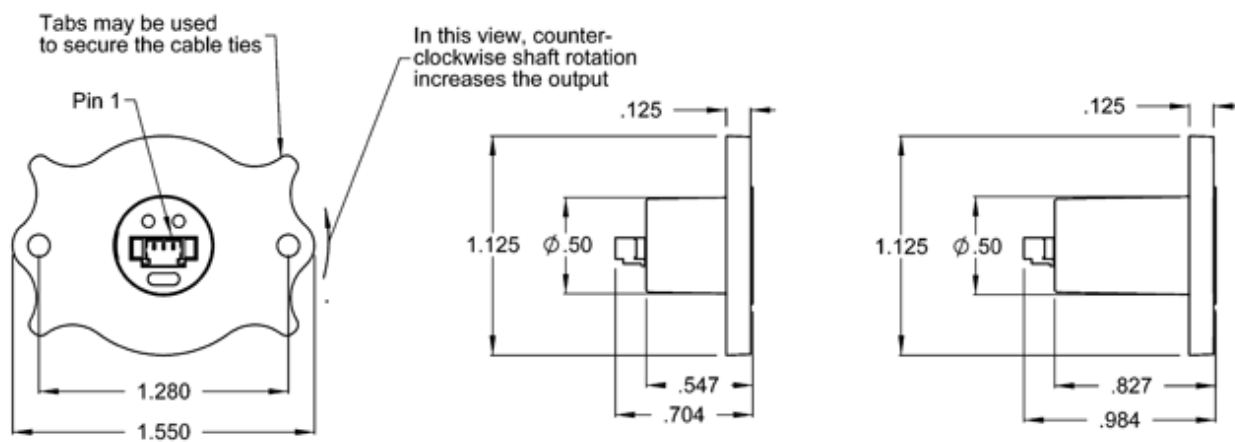

MAE3 Absolute Magnetic Kit Encoder

Page 3 of 9

Size 7 Bolt Circle

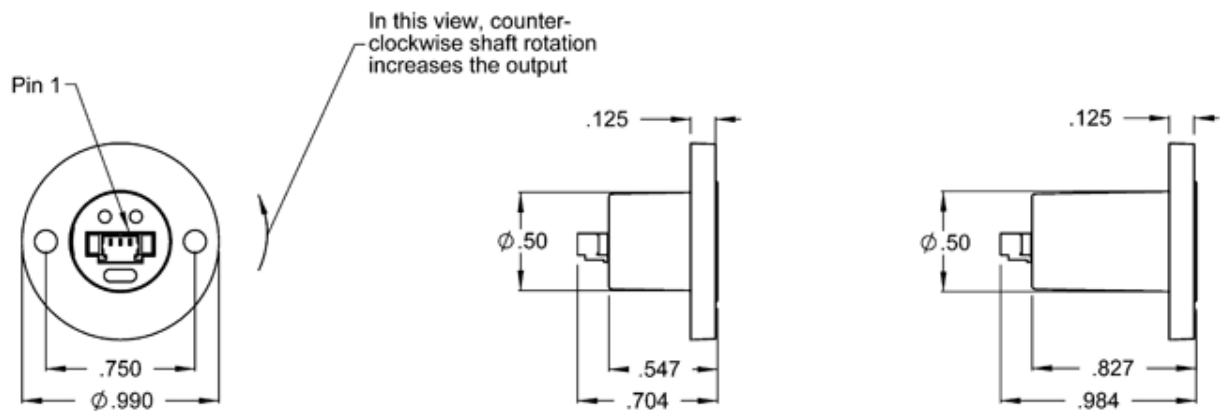

Mechanical

Parameter	Value	Units
Moment of Inertia	8.49×10^{-7}	oz-in-s ²
Mounting Screw Size (pan head)	4-40 x 1/4"	-
Required Shaft Length		
Size 220 Shaft Length-option	0.220 (+0.04 / -0.02)	in.
Size 500 Shaft Length-option	0.500 (+0.04 / -0.02)	in.
Base to Mounting Surface Torque	4 - 6	in.-lbs.
Shaft diameter tolerance, relative to nominal	-0.0001 to -0.0006	in.

Absolute Maximum Ratings

Parameter	Max. Value	Units
Vibration (5Hz to 2kHz)	20	G
Shaft Axial Play	±0.025	in.
Shaft Eccentricity Plus Radial Play	0.004	in.
Acceleration	250,000	rad/sec ²

Note that radial play translates directly to position inaccuracy.

Electrical

Parameter	Min.	Typ.	Max.	Units
-----------	------	------	------	-------

MAE3 Absolute Magnetic Kit Encoder

Page 4 of 9

Power Supply	4.5	5.0	5.5	Volts
Supply Current	-	16	20	mA
Power-up Time	-	-	50	mS




Environmental

Parameter	Value
Operating Temperature	-40C to +125C
Storage Temperature	-55C to +125C
ESD	± 2 kV max.
Humidity Non-condensing	5% to 85%



Analog Output Operation



Analog output is only available in 10-bit resolution. The analog output voltage is ratiometric to the power supply voltage and will typically swing within 15 millivolts of the power supply rails with no output load. This non-linearity near the rails increases with increasing output loads. For this reason, the output load impedance should be $\geq 4.7k\Omega$ and less than 100pF. The graphs below show the typical output levels for various output loads when powered by a 5V supply.

Parameter	Min.	Typ.	Max.	Units
Position Sampling Rate	2.35	2.61	2.87	kHz
Propagation Delay	-	-	384	?S
Analog Output Voltage Maximum	-	4.987	-	Volts*
Analog Output Voltage Minimum	-	0.015	-	Volts*
Output Short Circuit Sink Current	-	32	50	mA**
Output Short Circuit Source Current	-	36	66	mA**
Output Noise	160	220	490	μ Vrms**
Output Transition Noise	-	0.06	-	Degrees RMS***



* With no output load. See graphs below.

** Continuous short to +5V or ground will not damage the **MAE3**.

*** Transition noise is defined as the jitter in the transition between two adjacent position steps.

MAE3 Absolute Magnetic Kit Encoder

Page 5 of 9

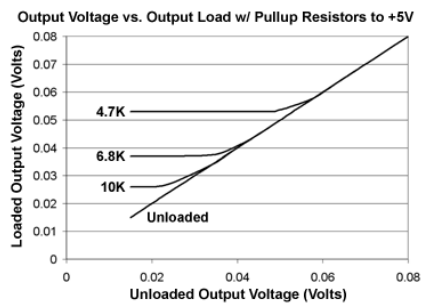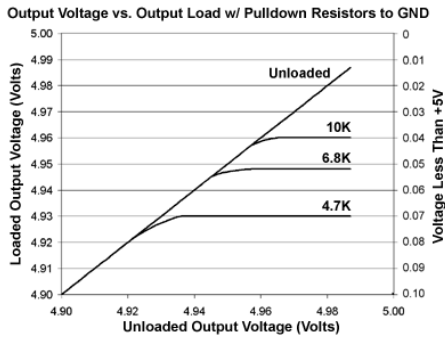

PWM Output Operation

The magnetic sensor chip in the **MAE3** has an on-chip RC oscillator which is factory trimmed to 5% accuracy at room temperature (10% over full temperature range). This tolerance influences the sampling rate and the pulse width of the PWM output. If only the PWM pulse width t_{on} is used to measure the angle, the resulting value also has this timing tolerance. However, this tolerance can be cancelled by measuring both t_{on} and t_{off} and calculating the angle from the duty cycle. Accuracy including non-linearity is within 0.5 deg. at 25C, but may increase to 0.9 deg. at high temperatures.

Parameter	Min.	Typ.	Max.	Units
PWM Frequency (-40C to 125C)				
10-bit	0.877	0.975	1.072	kHz
12-bit	220	244	268	Hz
Minimum Pulse Width				
10-bit	0.95	1.00	1.05	µS
12-bit	0.95	1.00	1.05	µS
Maximum Pulse Width				
10-bit	974	1025	1076	µS
12-bit	3892	4097	4302	µS
Internal Sampling Rate				
10-bit	9.38	10.42	11.46	kHz
12-bit	2.35	2.61	2.87	kHz

MAE3 Absolute Magnetic Kit Encoder

Page 6 of 9

Parameter	Min.	Typ.	Max.	Units
Propagation Delay				
10-bit	-	-	48	?S
12-bit	-	-	384	?S
High Level Output Voltage (VOH: @4mA Source)	V _{CC} -0.5	-	-	V*
Low Level Output Voltage (VOL: @4mA Sink)	-	-	0.4	V*


* Continuous short to +5V or ground will not damage the **MAE3**.

10-bit PWM:

$$x = ((t_{\text{on}} * 1026) / (t_{\text{on}} + t_{\text{off}})) - 1$$

If $x \leq 1022$, then Position = x

If $x = 1024$ then Position = 1023

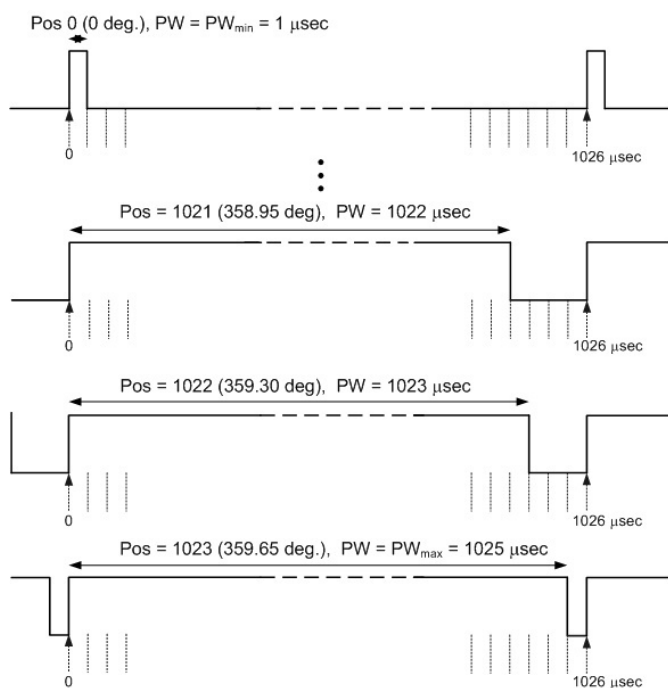

12-bit PWM:


MAE3 Absolute Magnetic Kit Encoder

Page 7 of 9

$$x = ((t_{on} * 4098) / (t_{on} + t_{off})) - 1$$

If $x \leq 4094$, then Position = x

If $x = 4096$ then Position = 4095

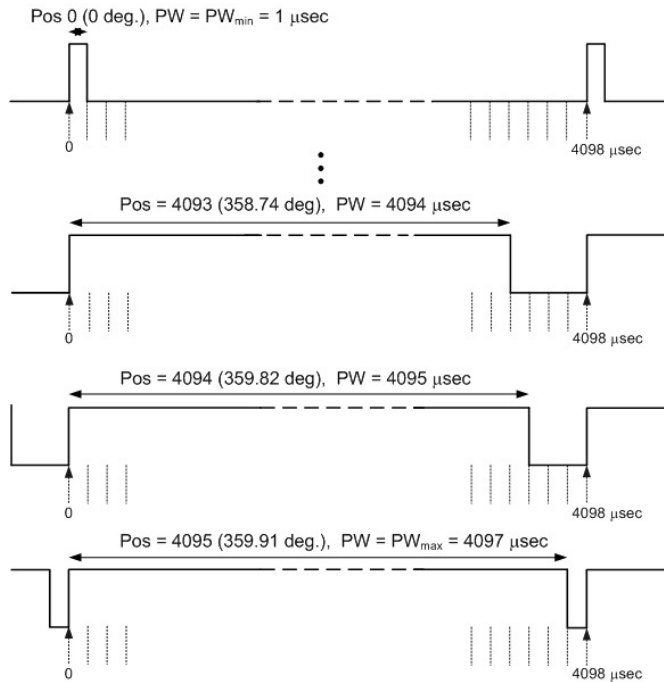

Pin-outs

Analog Output (MAE3-A):

Pin	Name	Description
1	5	+5VDC power
2	A	Analog output
3	G	Ground

PWM Output (MAE3-P10, MAE3-P12):

Pin	Name	Description
1	5	+5VDC power
2	A	PWM output

MAE3

Absolute Magnetic Kit Encoder

Page 8 of 9

Pin	Name	Description
3	G	Ground



Accessories

Screws

Part #:	SCREW-440-250-PH
Description:	4-40 x 1/4" Pan head screw
Quantity Required for Mounting	2 per encoder



MAE3 Absolute Magnetic Kit Encoder

Page 9 of 9

Ordering Information

MAE3 -		-		-		-		-	
	Interface		Bore		Shaft Length		Bolt Circle		Packaging
	A10 =10-Bit Analog		079 =2mm		220 =0.220"		7 =0.750"		B =Encoder components packaged in bulk.
	P10 =10-Bit PWM		091 =2.3mm		500 =0.500"		12 =1.280"		1 =Each encoder packaged individually
	P12 =12-Bit PWM		098 =2.5mm				18 =1.812"		
			118 =3mm						
			125 =1/8"						
			156 =5/32"						
			157 =4mm						
			188 =3/16"						
			197 =5mm						
			236 =6mm						
			250 =1/4"						

Notes

- › Cables and connectors are not included and must be ordered separately.
- › This product is warranted against defects in materials and workmanship for two years.



We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
