

US DIGITAL LIN Transmissive Linear Strip

Page 1 of 1



Description

US Digital offers a wide variety of standard linear strips. These products are available in many different resolutions and lengths. The material used is mylar polyester film. This material is very rugged and virtually unbreakable with a wide temperature range of -20°C to +100°C. There is no minimum order.

The mylar linear strips have a thickness of .007" and are cut to a width of 0.700".

Mechanical alignment drawings for optical encoder linear strips and optical encoder modules are available (*see the EM1 and EM2 data sheets*)


This product is RoHS compliant.

US Digital warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

Index Option

Number of inches from left side of linear strip.

Text Right Reading
Index Pattern on Bottom

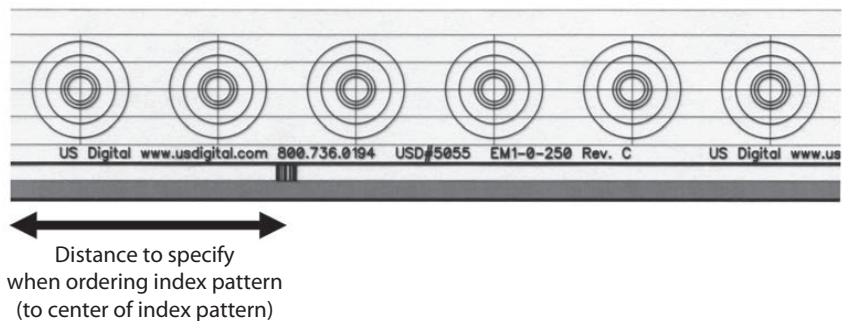

Ordering Information

LIN	-		-		-	
		CPI		Length		Index
		120		1 to 35.5 (non-index)		N
		125		1 to 35.5 (index)		1 to 35
		127				
		200				
		250				
		300				
		500				
		1000				
		2000				

v20141008

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
