
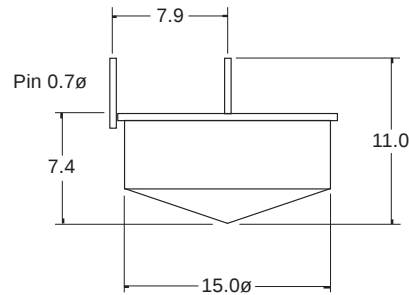


PRODUCT DATA SHEET



Drawings not to scale
All dimensions in mm

SPECIFICATION

CONTACT FORM/STYLE		Closed
SWITCHING VOLTAGE	Max. Vac	60
SWITCHING CURRENT	Max. A	0.25
SWITCHING CAPACITY (RESISTIVE)	Max. VA	3
DIFFERENTIAL ANGLE	Max. Deg°	-
CONTACT RESISTANCE	Max. Ω	6
OPERATING ANGLE	Max. Deg°	$25^\circ \pm 15^\circ$
OPERATING TEMPERATURE	Deg. °C	$-37^\circ + 100^\circ$
STORAGE TEMPERATURE	Deg. °C	$-40 + 125$
CASE MATERIAL		Steel-tin plated
MOUNTING CLIPS		None
FEATURES		Standard Tip-over

NOTE: When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

TILT/TIP SWITCHES (NON MERCURY)

PART NUMBER
CW1725-1

Rev. No.	Revision Note	Date	Signature
B	1998 Catalogue Page 14	1-1-98	RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

©1996

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
