


DRAWING #: AG3011-90

| REV. | DATE     | REVISION DESCRIPTION | DR.  |
|------|----------|----------------------|------|
| A    | 04/12/00 | ORIGINAL             | S.H. |
| B    | 05/21/01 | REVISION #052101-I   | P.C. |
| C    | 08/19/04 | SEE ECN #2004-171    | R.F. |

ENVIRONMENTALLY FRIENDLY TILT SWITCH, CONTAINS NO HAZARDOUS MATERIALS

## NOTE:

1. CONTACT IS CLOSED ON COUNTER CLOCKWISE ROTATION.
2. LOAD RATING: 1 AMP @ 6-24 VDC., 25 W @ 120 VAC.
3. CONTACT RESISTANCE 3 OHMS MAX.
4. LEAD WIRE #18 AWG. NEOPRENE INSULATION.
5. DIFFERENTIAL ANGLE 10° MAX.

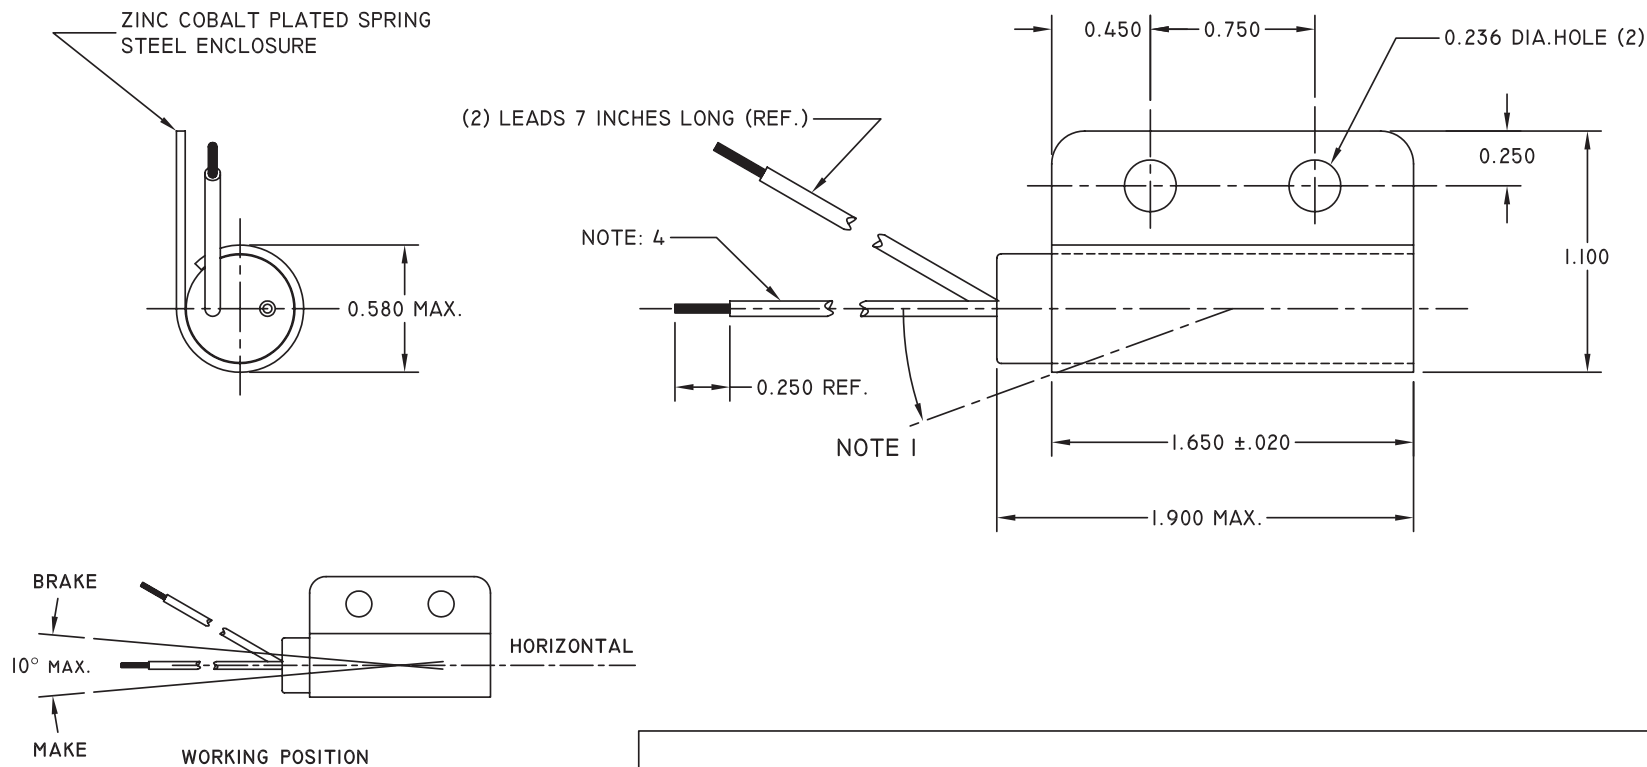

|             |           |      |                                                                                                                             |                                 |        |                      |          |
|-------------|-----------|------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------|----------------------|----------|
| ENGINEERING |           |      | UNSPECIFIED TOLERANCES<br>DECIMAL: .XX ± 0.01 [.254]<br>.XXX ± 0.005 [.127]<br>FRACTIONAL: ± 1/64 [.397]<br>ANGULAR: ± 1/2° | REF.:                           | SCALE: | DRAWN BY:            | DATE     |
| QUALITY     |           |      |                                                                                                                             |                                 | 5:4    | P.C.                 | 05/21/01 |
| PRODUCTION  |           |      |                                                                                                                             | TITLE: ENCAPSULATED TILT SWITCH |        |                      |          |
| APPROVAL    | SIGNATURE | DATE |                                                                                                                             | TYPE: PRODUCTION                |        | DRAWING #: AG3011-90 |          |

## We are here for you. Addresses and Contacts.

---

### Headquarter Switzerland:

Angst+Pfister Sensors and Power AG  
Thurgauerstrasse 66  
CH-8050 Zurich

Phone +41 44 877 35 00  
[sensorsandpower@angst-pfister.com](mailto:sensorsandpower@angst-pfister.com)

### Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim

Phone +49 89 374 288 87 00  
[sensorsandpower.de@angst-pfister.com](mailto:sensorsandpower.de@angst-pfister.com)

### Office North America:

Angst+Pfister North America Inc.  
10391 Brecksville Rd.  
Brecksville, OH 44141

Phone +1 440 375-5212  
[info.apus@angst-pfister.com](mailto:info.apus@angst-pfister.com)

Scan here and get an overview of personal contacts

