

P510 SERIES

0 to 5, 0 to 10, ± 5 , ± 10 VDC ANALOG OUTPUT

The P510 series transducer offers a voltage output with wide adjustability to give a 0 to 5, 0 to 10, ± 5 or ± 10 VDC output. The device may be powered with an unregulated voltage in the range of 4.9 to 30 VDC. Zero and span adjustment potentiometers are readily accessible. With the zero position set anywhere within the first 30% of total travel, the span may be adjusted to give a full 0 to 5 or 0 to 10 VDC output with the span set anywhere within the last 20% of travel. Alternatively, the zero position may be set anywhere between 10% and 90% of full travel to give an output of ± 5 or ± 10 VDC with the span set between 50% to 100% of the longest travel from the zero position.



SPECIFICATIONS

GENERAL

Linearity	
2", 3", 4" & 5" Ranges	$\pm 0.30\%$ Full Scale
10", 15", 20" & 25" Ranges	$\pm 0.20\%$ Full Scale
All other ranges	$\pm 0.15\%$ Full Scale
Repeatability ⁽¹⁾	$\pm 0.015\%$ Full Scale
Resolution	Essentially Infinite
Construction	Aluminum Cover & Baseplate
Sensing Device	Precision Potentiometer
Connector	MS3102A-14S-6P
Wire Rope	$\varnothing 0.016$ Stainless Steel
Wire Rope Tension	See Supplemental Data ^[3] , Table 7
Wire Rope Inbound Acceleration	See Supplemental Data ^[3] , Table 7
Weight	
Up to 50"	1.0 lb. (0.45 Kg)
60" & 80"	1.4 lb. (0.63 Kg)
Dimensional Information	See Supplemental Data ^[3] , Fig. 1 & 2
Options and Accessories	See Supplemental Data ^[3]

ENVIRONMENTAL

Thermal Coefficient of Sensing Element	± 100 PPM/ $^{\circ}$ C max.
Operating temperature	-40° C to $+95^{\circ}$ C
Operating humidity	95% R.H. max. non-condensing
Vibration	15 G's 0.1 ms max.
Shock	50 G's 0.1 ms max.
Ingress Protection	NEMA 1, IP-40

ELECTRICAL

Output	0 to 5 or 10 VDC, ± 5 or ± 10 VDC
Excitation Voltage	4.9 to 30 VDC
Excitation Current	25 mA max.
Output Impedance	10 Ω max.
Output Load	5K Ω min.

ADJUSTMENT RANGE—0 TO 5 OR 0 TO 10 VDC


Zero	0 to 30% of Range
Span	80% to 100% of Range

ADJUSTMENT RANGE— ± 5 OR ± 10 VDC

Zero	10% to 90% of Range
Span	50% to 100% of Longest Possible

Travel from Zero Position

Protection	Reversed Polarity
Temperature Stability	0.02%/ $^{\circ}$ C of Span



FOOTNOTES TO SPECIFICATIONS

1. Moving to the same position from the same direction.
2. Span may be adjusted from 5 VDC to 10 VDC within percentage of range shown.
3. Supplemental Data section located at end of Standard Series pages.

MODEL NUMBER CONFIGURATION

P510- 0 1 2 3 4 6 7 0 9

BASIC CONFIGURATION (FOR ALL RANGES)


P510-50-S10-N0S-10C

0 RANGE
2.....2" (50 mm)
3.....3" (75 mm)
4.....4" (100 mm)
5.....5" (125 mm)
10.....10" (250 mm)
15.....15" (390 mm)
20.....20" (500 mm)
25.....25" (640 mm)
30.....30" (750 mm)
40.....40" (1000 mm)
50.....50" (1250 mm)
60.....60" (1500 mm)
80.....80" (2000 mm)

1 WIRE ROPE
S..... $\varnothing 0.016$ (0.4 mm) Stainless Steel
N..... $\varnothing 0.018$ (0.45 mm) Nylon Jacketed Stainless Steel

2 WIRE ROPE TENSION
1.....Standard (50 G Units to 50")
2.....Reduced (See Table 7 for Value)
3.....Increased (100G on Units With Ranges From 2" to 50")

3 WIRE ROPE EXIT DIRECTION
Use Number designators shown



4 DUST WIPER OPTION
N.....No dust wiper
D.....Dust Wiper Included

6 ELECTRICAL OUTPUT POLARITY
S.....Standard (increasing output as wire rope is extended)
R.....Reversed (decreasing output as wire rope is extended)

7 CONNECTOR LOCATION
Use Number designators shown
Top View
Diagram showing connector locations 1 and 3.

9 ELECTRICAL INTERFACE
C.....Mating Connector Included
K.....Mating Connector Omitted*
T.....Terminal Strip
*Electrical cable with mating connector may be ordered separately as part number 10028-xM where 'x' is the length required in meters.

STANDARD SERIES

SUPPLEMENTAL DATA



LIFE*

Ranges 2" to 5"	5,000,000 full stroke cycles
Ranges 10" to 25"	500,000 full stroke cycles
Ranges 30" to 80"	250,000 full stroke cycles


*With 1K ohm potentiometer, wire rope misalignment 2° maximum at full stroke, relatively dust free environment, and with nylon jacketed wire rope

OPTION DESCRIPTIONS

OPTION	OPTION DESIGNATOR	DESCRIPTION								
WIRE ROPE	N	Replaces standard stainless steel wire rope with Ø.018 nylon jacketed wire rope. Increases wire rope life dramatically but may increase non-linearity by as much as ±0.05% of full scale.								
Nylon jacketed wire rope										
WIRE ROPE TENSION	2	Reduces the overall tension in the wire rope and increases wire rope life. Dynamic response of the transducer is reduced due to the reduced inbound acceleration capability.								
Reduced Wire Rope Tension										
Increased Wire Rope Tension	3	Increases tension in the wire rope which increases the dynamic response of the transducer. On selected units with range of 50" (1250 mm) or less, inbound acceleration capability is 100G's. Wire rope life may be adversely affected by the HG option.								
DUST WIPER	D	Lubricated wiper strips dust and debris from wire rope as it retracts into case. Adds 0.36" (9 mm) height to wire rope exit location.								
POTENTIOMETER VALUE	2,3,4	Non-standard potentiometer linearity is as follows:								
Non-standard potentiometer (applies to PA series only)		<table><tr><th>RANGE</th><th>LINEARITY</th></tr><tr><td>5" and Below</td><td>±1.00% of full scale</td></tr><tr><td>10" to 25"</td><td>±0.50% of full scale</td></tr><tr><td>30" and above</td><td>±0.25% of full scale</td></tr></table>	RANGE	LINEARITY	5" and Below	±1.00% of full scale	10" to 25"	±0.50% of full scale	30" and above	±0.25% of full scale
		RANGE	LINEARITY							
		5" and Below	±1.00% of full scale							
		10" to 25"	±0.50% of full scale							
30" and above	±0.25% of full scale									
Note: This option is subject to potentiometer availability.										
ELECTRICAL OUTPUT POLARITY	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity or encoder signal.								
Reversed output										
ELECTRICAL INTERFACE	T	Replaces connector with a terminal strip.								
Terminal strip										

10067 – AUXILIARY WIRE ROPE EXTENSION KIT

The auxiliary wire rope extension may be used to facilitate mounting the transducer remotely from the measurement point. The clip on the extension attaches to the eye fitting on the transducer. The eye fitting on the opposite end, which is identical to the fitting on the transducer, mounts to the moving element. The extension kit is also available with the clip end unterminated for situations where it is more convenient to size the wire rope length during installation. Clip and crimp fitting are included with the unterminated version.

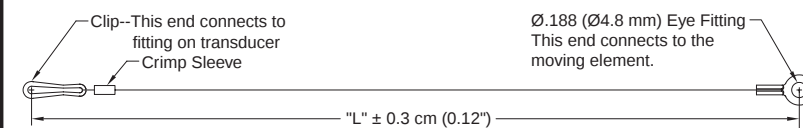

10067-¹-CM-²

1 DIMENSION "L"	Specify Dimension "L" in centimeters to the nearest whole centimeter NOTES: 1. 1 cm = 0.394", 1 inch = 2.54 cm 2. Shortest length "L" is 5 cm (approximately 2")
2 UNTERMINATED CLIP END	Leave Blank..... Completed Kit (No designator required) U..... Unterminated Clip End (clip and crimp sleeve included in kit)

REPLACEMENT WIRE ROPE KITS

The replacement Wire Rope Kit includes a new wire rope with all end terminations, wire rope guide, felt dust wiper where applicable and installation instructions. To order, replace 'xx' in the part number with the applicable measurement range in inches.

- 10107-xx Replacement Wire Rope Kit**—Standard Ø.016" Stainless Steel Wire Rope.
- 10108-xx Replacement Wire Rope Kit**—Ø.018" Nylon Jacketed Stainless Steel Wire Rope.
- 10127-xx Replacement Wire Rope Kit**—Standard Ø.016" Stainless Steel Wire Rope with Dust Wiper.
- 10128-xx Replacement Wire Rope Kit**—Ø.018" Nylon Jacketed Stainless Steel Wire Rope with Dust Wiper.

STANDARD SERIES

SUPPLEMENTAL DATA



ADDITIONAL OPTIONS


TABLE 7

PA, PB, P420 & P510 SERIES									EP SERIES			V & VP SERIES		
Range Designator	Range		Wire Rope Standard Tension		Wire Rope Standard Acceleration	Wire Rope Reduced Tension		Wire Rope Reduced Acceleration	Wire Rope Reduced Tension		Wire Rope Reduced Acceleration	Wire Rope Reduced Tension		Wire Rope Reduced Acceleration
	(in)	(mm)	(oz)	(N)	(G's)	(oz)	(N)	(G's)	(oz)	(N)	(G's)	(oz)	(N)	(G's)
2	2	50	34	9.5	>50	16	4.4	28	—	—	—	16	4.4	14
3	3	75	24	6.7	>50	14	3.9	16	—	—	—	14	3.9	15
4	4	100	24	6.7	>50	11	3.1	12	—	—	—	11	3.1	15
5	5	125	34	9.5	>50	8	2.2	7	—	—	—	8	2.2	6
10	10	250	34	9.5	>50	16	4.4	28	16	4.4	19	16	4.4	14
15	15	390	24	6.7	>50	14	3.9	16	—	—	—	14	3.9	15
20	20	500	24	6.7	>50	11	3.1	12	—	—	—	11	3.1	14
25	25	640	34	9.5	>50	8	2.2	7	8	2.2	7	8	2.2	6
30	30	750	24	6.7	>50	14	3.9	16	—	—	—	14	3.9	15
40	40	1000	24	6.7	>50	11	3.1	12	—	—	—	11	3.1	12
50	50	1250	34	9.5	>50	8	2.2	7	8	2.2	7	8	2.2	5
60	60	1500	24	6.7	27	7	1.8	2	7	1.8	5	7	1.8	6
80	80	2000	19	5.3	16	5	1.4	2	5	1.4	2	5	1.4	3


DIMENSIONAL INFORMATION

STANDARD SERIES | PA, PB, P420, P510, EP & V SERIES

RANGES TO 50" (1250 mm)

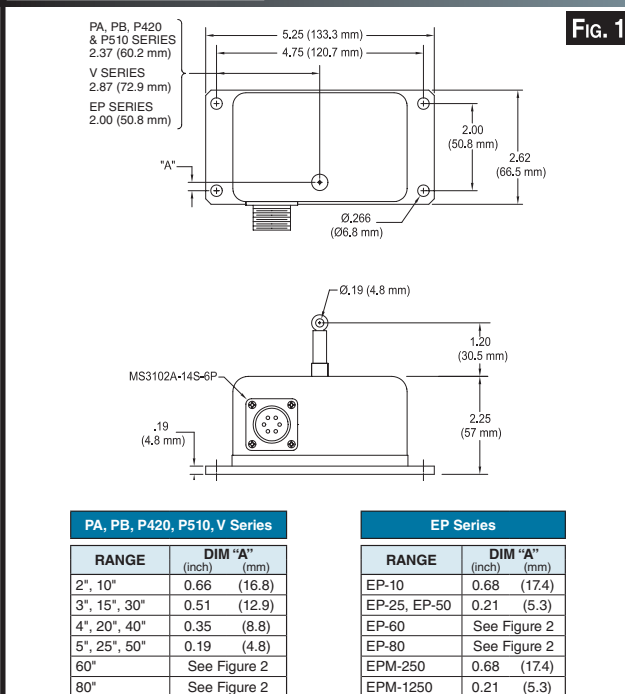

RANGES TO 60" (1500 mm) and 80" (2000 mm)

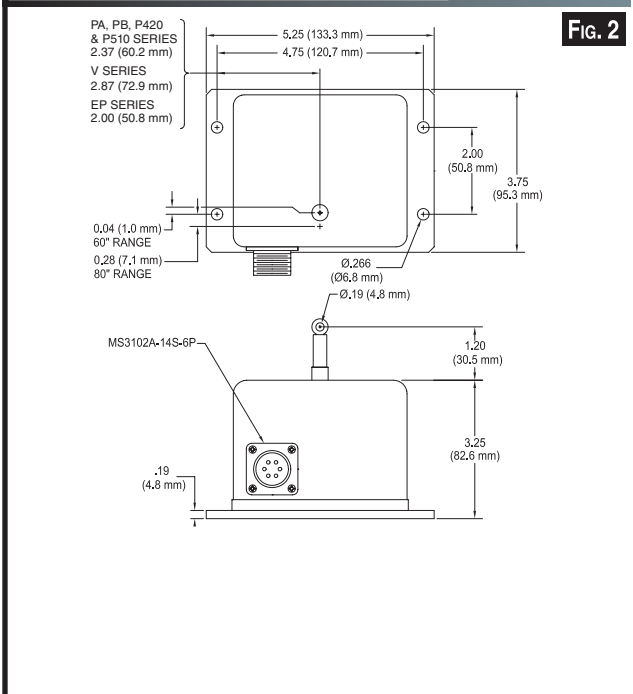

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
