



THIS PRODUCT COMPLIES WITH RoHS DIRECTIVE.

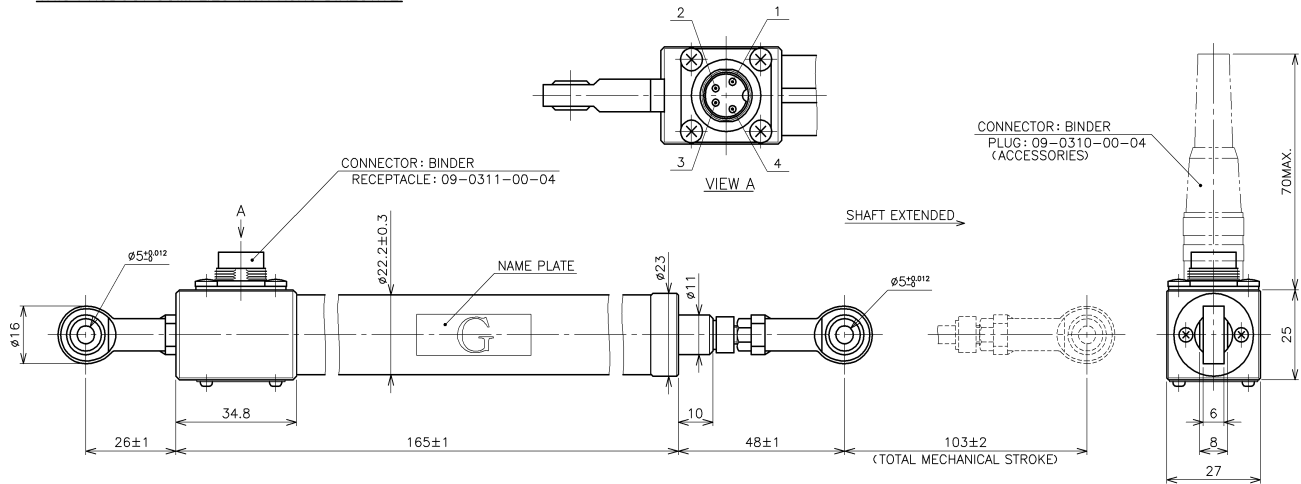

SPECIFICATIONS

ELECTRICAL STROKE	: 100±1mm
TOTAL RESISTANCE	: 1・2・5・10kΩ ±20%
INDEPENDENT LINEARITY	: ±0.3% (AVAILABLE: ±0.1%)
POWER RATING	: 2W/70℃
OUTPUT SMOOTHNESS	: 0.1% MAX.
INSULATION RESISTANCE	: 100MΩ MIN. DC500V
DIELECTRIC STRENGTH	: AC500V 1MINUTE
TEMPERATURE COEFFICIENT OF RESISTANCE	: ±400ppm/K
TOTAL MECHANICAL STROKE	: 103±2mm
FRICTION	: 2N MAX.

SCHEMATIC



・ 1, 2, 3, 4: CONNECTOR PIN No.

NAME PLATE



REV	DATE	DESCRIPTION	DRAWN	CHKD
△				

DRAWING FOR APPROVAL		SPEC. NO.	
MODEL: LP-100F-13			
APPROVED	TOLERANCE	DATE	1.27.10
CHECKED	±10 ±0.25	SCALE	1:1
DRAWN	±100 ±0.5	DRAWING PRACTICE	⊕ ⊖
MIDORI PRECISIONS CO., LTD.		DRAWING NO.	
B-MPE-B93			

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
