

Contactless Hall-IC Angle Sensor

CP-2HX Serie

Sensor Part




Shaft Part(MH01)

- Thin & Touchless (No shaft) Type
- Contactless Hall-IC Angle Sensor
- Effective Electrical Travel: $\pm 180^\circ$
- Absolute Linearity: $\pm 2\%FS$
- Voltage Ratio or PWM Output
- Dual Output (6 wires)
- Shaft Part : "MH01" (See below)
- Water drip proof : IP67
- 【Option】
- Effective Electrical Travel: $\pm 45^\circ$ 、 $\pm 90^\circ$
- Dual Parallel Output

Dimension [mm]


Sensor Part

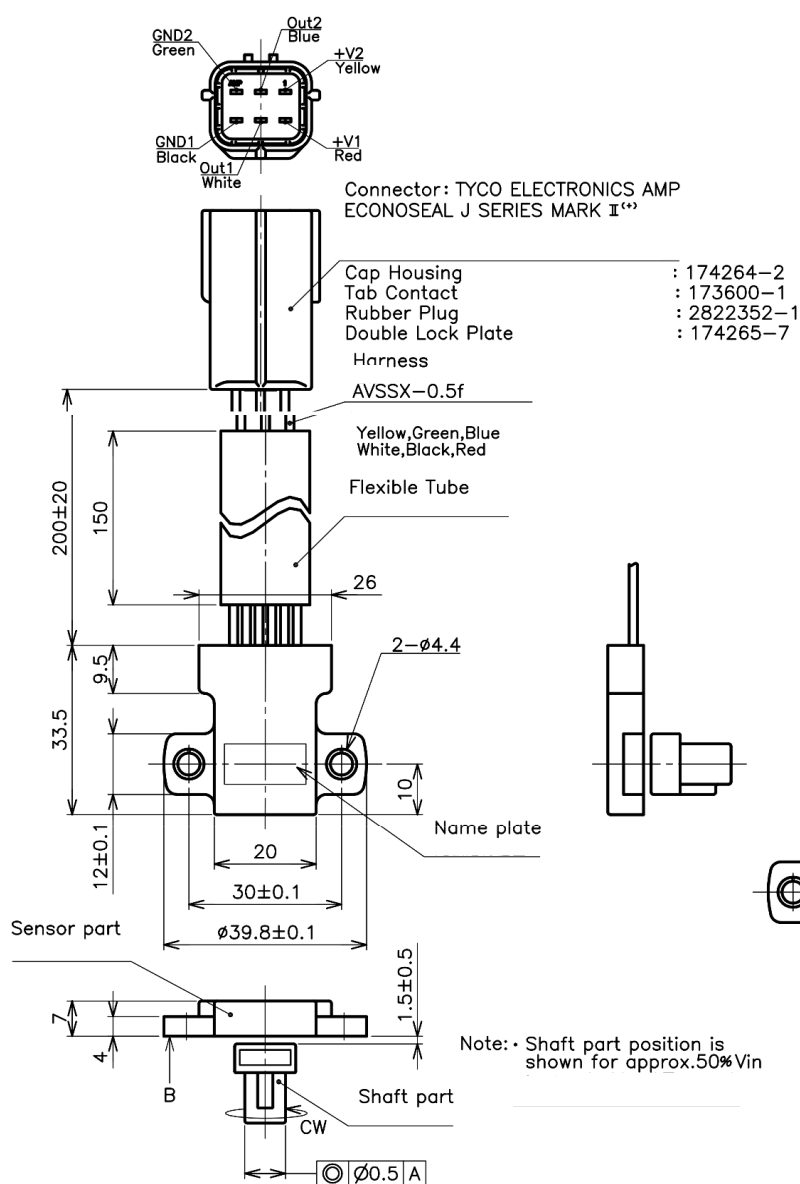

■ Dimension [mm]


Shaft Part(Model:MH01)

Note: If you require a custom shaft part, please contact us.

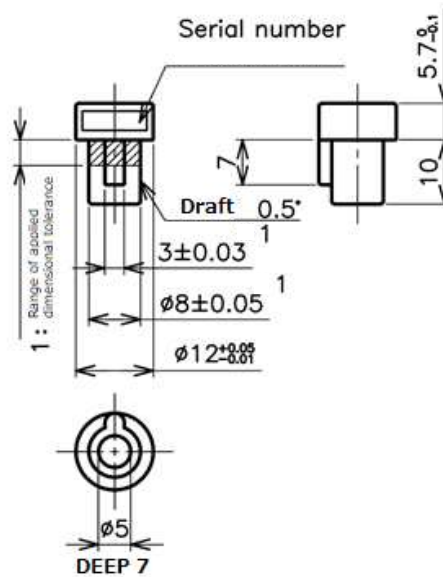


■ Mounting [mm]

Sensor Part

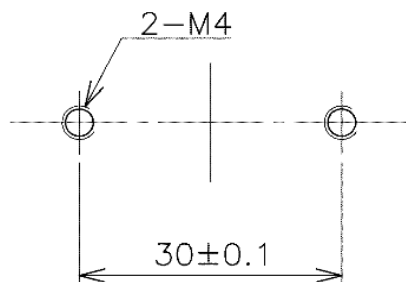

Shaft Part

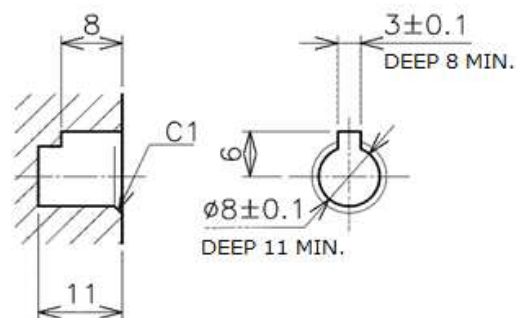


* Gap of Sensor Part and Shaft Part

Gap between Sensor Part and Shaft Part are recommended value of the table below. If Gap is out of recommendation value the specifications (Linearity, etc.) may be out of specifications.


Mounting Recommendation Value

Direction	Recommendation value
Z Direction	1.5mm (0.5mm~3.5mm)
X⇔Y Direction	±0.5mm

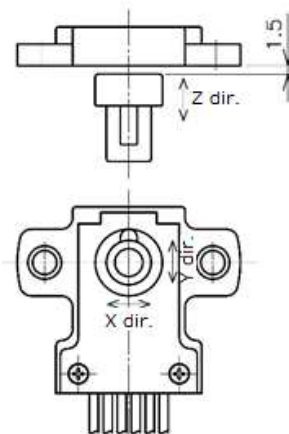


■ Output Characteristics


Cross Output (Standard)

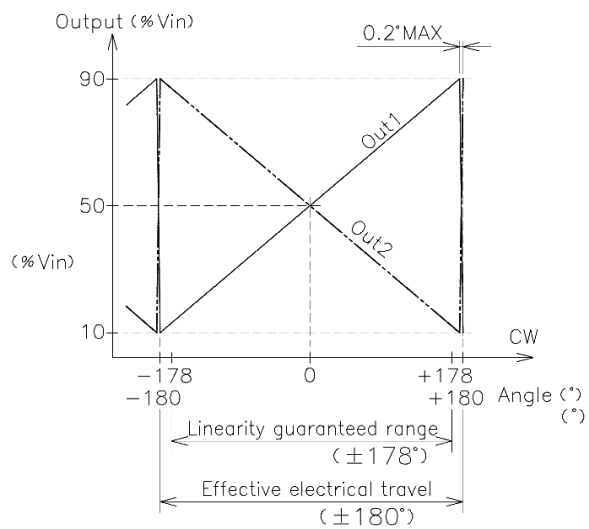

Parallel Output (Option)

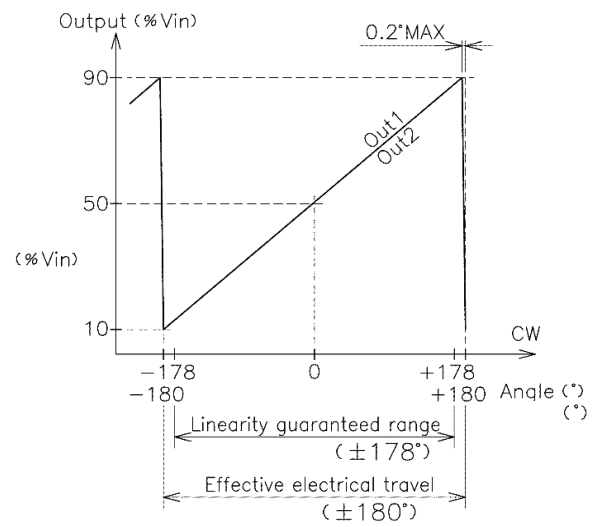

■ Schematic

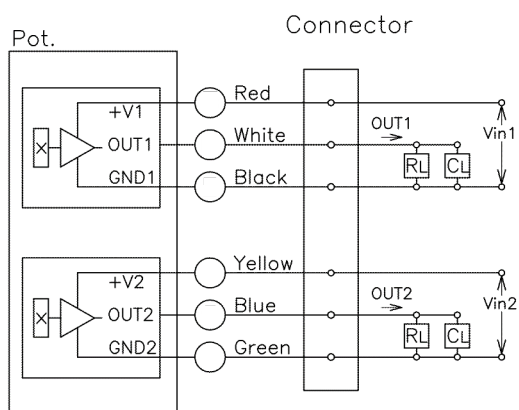

- Red, white, black, yellow, blue and green indicate harness colors.

【Model Number】	CP2HXCxxxRx	CP2HXPxxxRx	CP2HXCxxxPx	CP2HXPxxxPx
----------------	-------------	-------------	-------------	-------------

【Electrical Specifications】

Effective Electrical Travel	±180(Option: ±45°、±90°)				°
Output Range	Ratio Output 10~90%Vin		PWM 10~90%Duty		
Absolute Linearity	±2 (When Gap is recommendation value)				%FS
Input voltage	DC5±0.5				V
Load Resistance	10 min./1ch				kΩ
Current Consumption	10 max./1ch				mA
Insulation Resistance	100以上/DC50V				MΩ
Resolution	12(0~100%Vin)				bit
Hysteresis	1.0				%FS
Temp. Characteristics -40~+85℃ (25℃ std.)	±1				°
Dual Output Difference	OUT1+OUT2:100±1%	OUT1+OUT2:±1%	OUT1+OUT2:100±1%	OUT1+OUT2:±1%	%Vin


【Mechanical Specifications】

Total Mechanical Travel	360 Endless	°
Mass	Approx. 30	g

【Environmental Specifications】

Lfie Cycles	Mechanical unlimited	
Category Temp. Range	-40~100	°C
Storage Temperature Range	-40~100	°C
Vibration	200m/s ² , 5~500Hz 10min, 3axis 2hours (Room Temp.)	
Shock	500m/s ² , 11ms, 3axis 3 times (Room Temp.)	
EMS	100V/m, 1MHz~1GHz (ISO 11452-2, -3)	
ESD (Case to Each Terminal)	Contact Discharge ± 15 (IEC 61000-4-2)	kV
ESD (Between Each Terminal)	Contact Discharge ± 15 (IEC 61000-4-2)	kV
IP Rating	IP67(Circuit part only)	

【CP-2HX Series Model Number Designation】

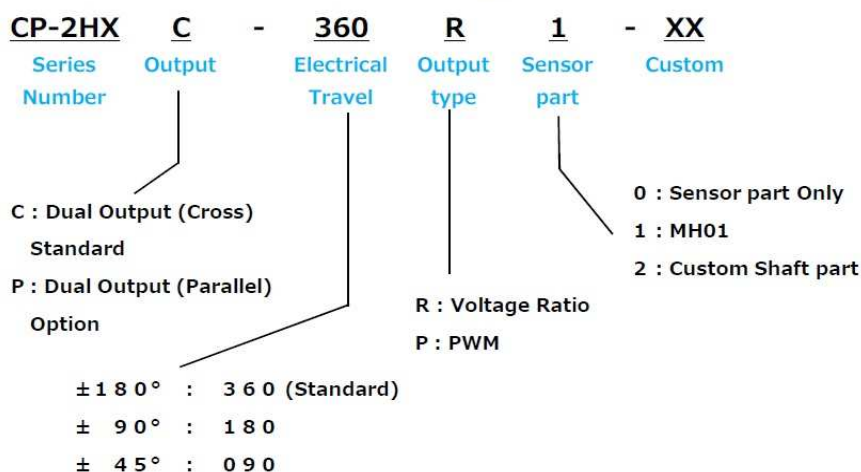

■Handling Instruction

- Please mating a pair of the sensor part and the shaft part (same serial numbers are marked) for being guaranteed the accuracy of this product.
- Please mount the sensor part and the shaft part just as this drawing dimension. Please the magnetic substance and the magnet are kept away from this product.
- This product uses the strong magnet. Please materials that are susceptible to magnetic force are kept away from this product.
- Use this sensor in the place where is protected from ESD.
- Do not connect other than above Schematic diagram

Headquarter Switzerland:
Pewatron AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
info@pewatron.com

Office Germany:
Pewatron Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
info.de@pewatron.com



PEWATRON
SENSORS · POWER SOLUTIONS

We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@pewatron.com

Pressure sensors Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@pewatron.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Sales Other Countries / Product Management

Pressure Sensors Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@pewatron.com

Gas sensors Gas sensor modules

Dr. Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@pewatron.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

Linear position sensors Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@pewatron.com

Accelerometers Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@pewatron.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@pewatron.com

Current sensors / Power solutions & Turkey

Osman Coban
Phone +49 89 374 288 87 65
osman.coban@pewatron.com

Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@pewatron.com

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
