
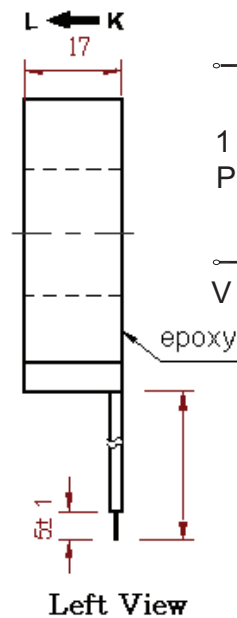


AC Current Transformers 50/60Hz


HY54-1 Series

Part Number	Electrical Characteristic					Photo
	I_R (A)	V_{out} (V)	Accuracy class (%)	I_{max} (A)	R_L (Ω)	
HY54-1-655U	25	2.5	0.5	20	100	
HY54-1-605U	30	2	0.5	50	100	
HY54-1-755U	30	1.5	0.2	65	100	
HY54-1-705U	50	2	0.2	85	100	
HY54-1-655X	30	3	3	75	100	
HY54-1-605X	40	2.66	1	120	100	
HY54-1-755X	50	2.5	1	140	100	
HY54-1-705X	75	3	1	200	100	

Mechanical Dimensions in mm

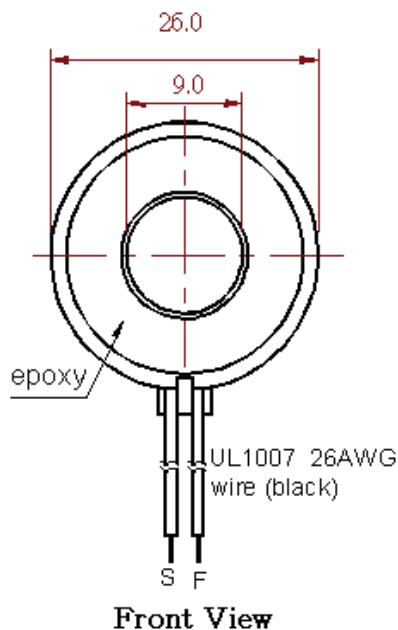

Test Circuit

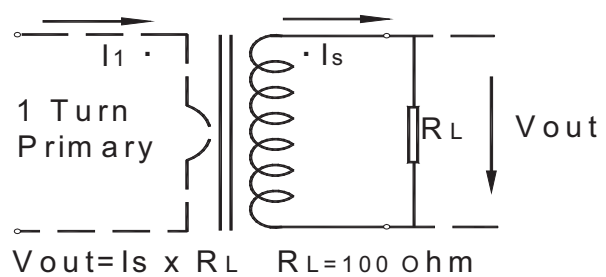

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
