
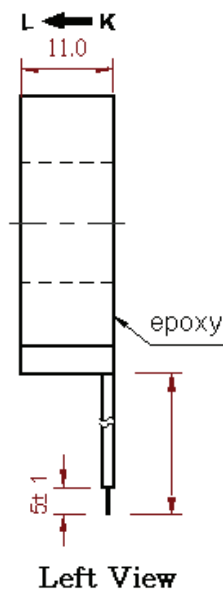


AC Current Transformers 50/60Hz


HY54-0 Series

Part Number	Electrical Characteristic					Photo
	I_R (A)	V_{out} (V)	Acc. (%)	I_{max} (A)	R_L (Ω)	
HY54-0-655U	5	0.5	0.5	15	100	
HY54-0-605U	15	1	0.5	25	100	
HY54-0-755U	20	1	0.2	40	100	
HY54-0-705U	25	1	0.2	45	100	
HY54-0-655X	20	2	3	45	100	
HY54-0-605X	25	1.66	1	50	100	
HY54-0-755X	35	1.75	1	110	100	
HY54-0-705X	40	1.6	1	150	100	

Mechanical Dimensions in mm

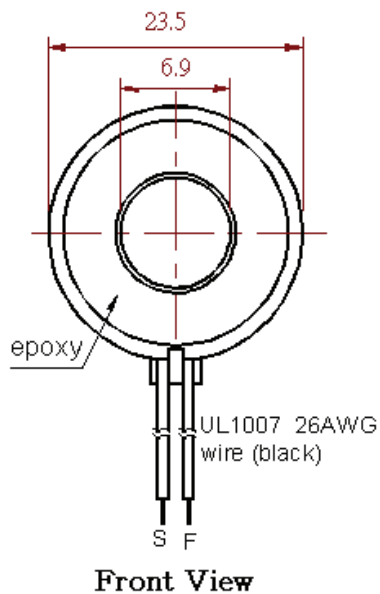

Test Circuit

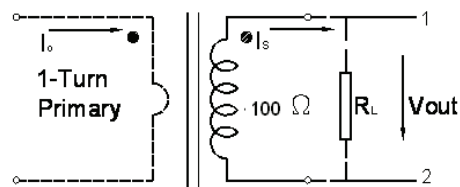

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
