
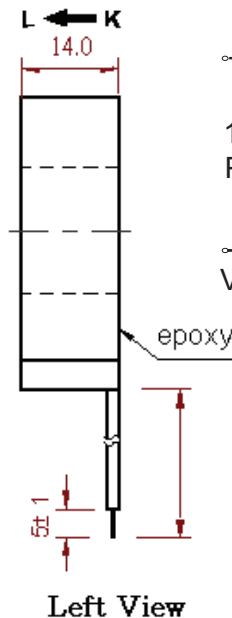


AC Current Transformers 50/60Hz


HY54-2 Series

Part Number	Electrical Characteristic					Photo
	I_R (A)	V_{out} (V)	Accuracy class (%)	I_{max} (A)	R_L (Ω)	
HY54-2-655U	30	3	0.2	45	100	
HY54-2-605U	35	2.3	0.2	75	100	
HY54-2-755U	50	2.5	0.2	130	100	
HY54-2-705U	80	3.2	0.2	145	100	
HY54-2-655X	60	6	1	130	100	
HY54-2-605X	75	5	1	250	100	
HY54-2-755X	100	5	0.5	360	100	
HY54-2-705X	150	6	0.5	420	100	

Mechanical Dimensions in mm

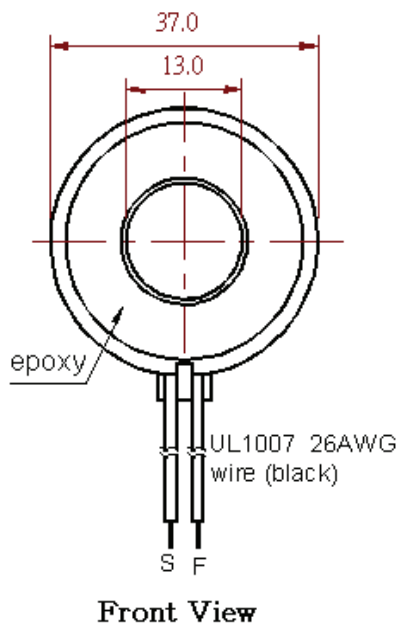

Test Circuit

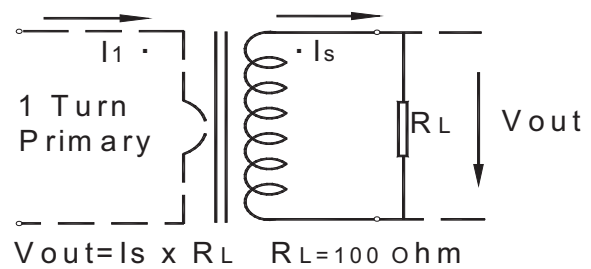

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
