



THIS PRODUCT COMPLIES WITH RoHS DIRECTIVE.

PAGE 1/1


OUTLINE DIMENSIONS

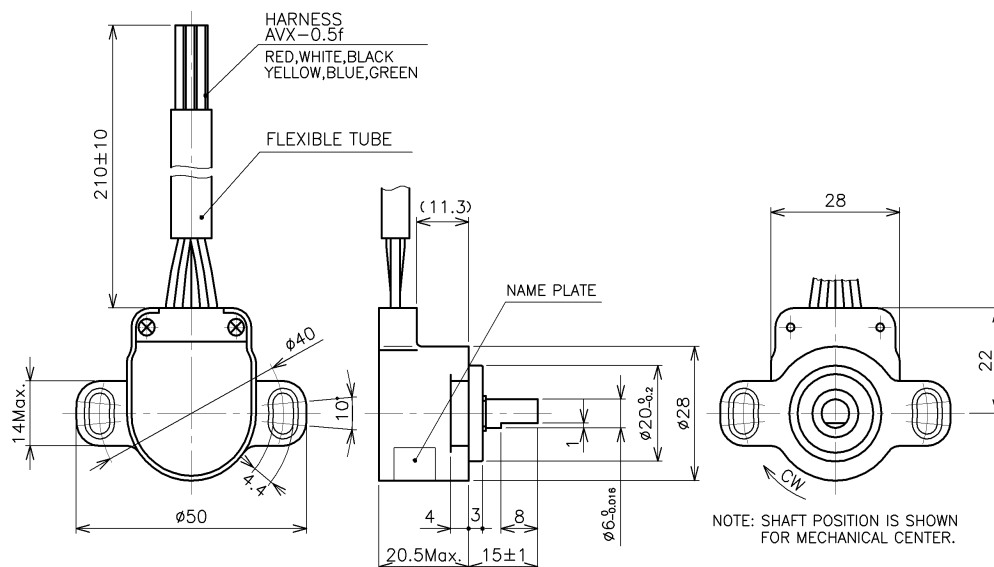

OUTPUT CHARACTERISTICS

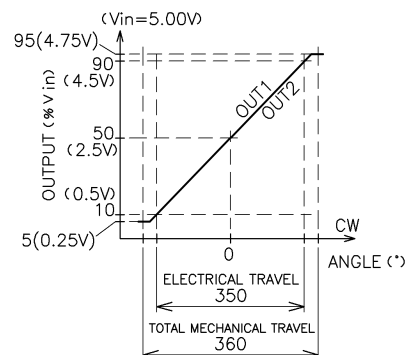

SCHEMATIC



RED,WHITE,BLACK,YELLOW,BLUE AND GREEN INDICATE HARNESS COLORS

SPECIFICATIONS

ELECTRICAL TRAVEL	: $\pm 175^\circ$
OUTPUT CHARACTERISTIC	: SEE FIGURE
ABSOLUTE LINEARITY	: $\pm 1\%$ FS
HYSTERESIS	: 0.5% MAX.
TEMP. CHARACTERISTIC	: $\pm 0.5\% V_{in}$ -20 ~ 100°C (REFERENCE TEMP. 25°C)
INPUT VOLTAGE	: 5 ± 0.5 VDC
SUPPLY CURRENT	: 22 mA MAX.
RESOLUTION	: 12bit / 0~100 % V_{in}
LOAD RESISTANCE	: 10 k Ω MIN.
INSULATION RESISTANCE	: 100 M Ω MIN. DC50V
TOTAL MECHANICAL TRAVEL	: 360° CONTINUOUS
TORQUE	: 180 mN·m MAX.
MASS	: APPROX. 37g
ALLOWABLE RADIAL SHAFT LOAD	: 4 N
ALLOWABLE AXIAL SHAFT LOAD	: 3 N
OPERATING TEMPERATURE	: -20 ~ 100°C
STORAGE TEMPERATURE	: -20 ~ 100°C
VIBRATION	: 110.7 m/s ² 18~2000Hz 3AXIS 8h
SHOCK	: 294 m/s ² 11ms 3AXIS 3TIMES
ESD	: $\pm 6kV$ (IEC 61000-4-2)
EMS	: 100V/m 200MHz~1GHz (ISO 11452-2) 100V/m 10MHz~200MHz (ISO 11452-3)
WATER PROOF	: IP65

NOTE

1. AS THIS PRODUCT IS USING "CMOS IC", HANDLING OF HARNESS MUST BE DONE UNDER THE ESD PROTECTION.
2. THIS PRODUCT MAY HAVE EXTERNAL MAGNETIC INFLUENCE OF THE APPARATUS WHICH GENERATES A MAGNETIC FIELD.
3. WHEN THE SHAFT IS COUPLED, PLEASE DO NOT APPLY HEAVY LOAD TO IT.

SPECIFICATION DRAWING				CUSTOMER/SPEC. NO.	
MODEL: CP-2HA-7				PEWATRON AG	
APPROVED	<i>M. Kamiki</i>	TOLERANCE	DATE Feb 21, '11	MIDORI PRECISIONS CO., LTD.	
CHECKED	T. Yamazaki	≤ 10 ± 0.25 10 < ≤ 100 ± 0.5 100 < ± 1.0 ANGLE $\pm 1.5^\circ$	SCALE 1:1	DRAWING NO.	REV.
DRAWN	Y. YOSHIZAWA	DRAWING PRACTICE		A-C2H-B34	0

REV.	DATE	DESCRIPTION	APPROVED	CHECKED	DRAWN
A3					

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich

Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim

Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
Brecksville, OH 44141

Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts

