

Conductive Plastic Angle Sensor

CP-2F Multi-turn Series - CP-2F-xxS-RB-x





- Conductive Plastic Angle Sensor
- Effective Electrical Travel : 3400° - 17000°
- Independent Linearity : $\pm 1.5\%$
- Retiometric Voltage Output

【Material】



- Housing : Aluminum
- Shaft : Stainless Steel
- Bearing : Stainless steel or Copper alloy

■ Dimension [mm]


CP-2F-10S-RB

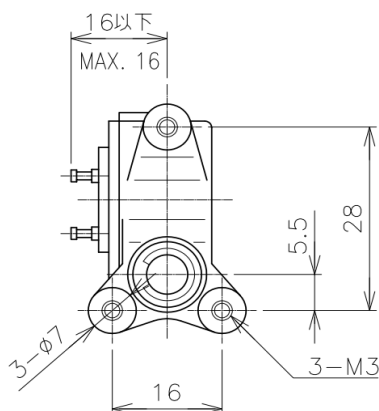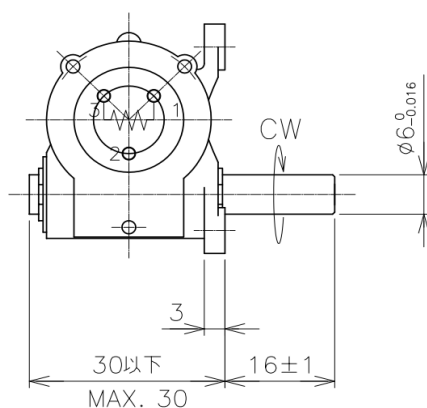


CP-2F-10S-RB-1

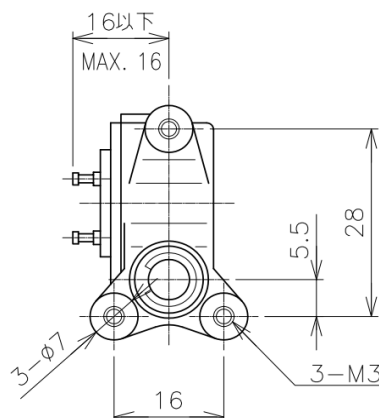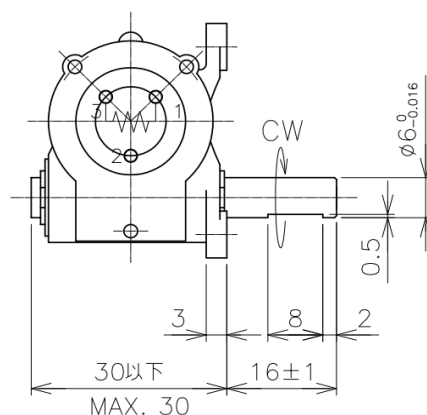


Output Characteristics

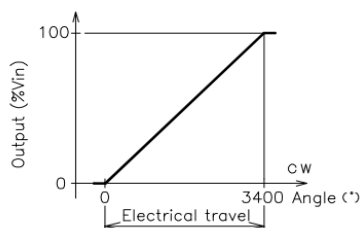

Schematic



Mounting



Model No.

CP-2F-10S-RB-1

CP-2F-10S-RB

CP-2F-35S-RB

CP-2F-50S-RB

Electrical Data

Effective Electrical Travel	3400 +20, -30	3400 +20, -30	11900 +70, -105	17000 +100, -150	°
Total Resistance	1, 2, 5				kΩ
Total Resistance Tolerance	±20				%
Independent Linearity	±1.5				%
Power Rating	0.5/50°C				W
Output Smoothness	MAX. 0.1				%
Insulation Resistance	MIN. 100/DC1000V				MΩ
Dielectric Strength	AC1000/1min.				V
Temperature Coefficient Of Resistance	±400				ppm/K

Mechanical Data

Gear Ratio	10:1	10:1	35:1	50:1	
Torque	MAX. 4				mN·m
Repeatability	MAX. 0.5				%
Thrust Load Tolerance	3				N
Radial Load Tolerance	5				N
Mass	Approx. 30				g

Environmental Data

Category Temperature Range	-40~+100	°C
Storage Temperature Range	-40~+100	°C

Handling Instruction

To avoid burnout of resistive element, do not supply 1mA Min. current to terminal 2.

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
